

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Mail Stop Appeal Brief - Patents, Commissioner for Patents, P. O. Box 1450, Alexandria, VA 22313-1450 on September 3, 2003

Mark A. Charles	51,547
Name of Attorney	Registration No.
Signature of Attorney	

RECEIVED  
OCT 02 2003  
TC 1700

RECEIVED  
OCT 03 2003  
TC 1700

P&G Case CM1882

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In the application of :  
Ceulemans *et al.* : Confirmation No. 5069  
Serial No. 09/774,267 : Group Art Unit: 1751  
Filed: January 22, 2001 : Examiner: Gregory R. Del Cotto

RECEIVED  
SEP 10 2003  
TC 1700

For FABRIC CARE COMPOSITIONS

BRIEF ON APPEAL

Mail Stop Appeal Brief – Patents  
Commissioner for Patents  
P. O. Box 1450  
Alexandria, VA 22313-1450

Dear Sir:

Enclosed, pursuant to 37 C.F.R. 1.192(a), is Appellant's brief on Appeal for the above application. The Brief is being forwarded in triplicate.

Please charge the fee of \$320.00 pursuant to 37 C.F.R. 1.17(c) to Deposit Account No. 16-2480 for the filing of the brief in support of an appeal. The Commissioner is also authorized to charge any additional fees which may be required to this account. A duplicate copy of this sheet is enclosed.

Respectfully submitted,

By   
Mark A. Charles  
Attorney for Applicants  
Registration No. 51,547  
(513) 627-4229

Date: September 3, 2003

Customer No. 27752

(BriefonAppealTrans.doc)  
(Last Revised 4/3/2003)



RECEIVED

SEP 10 2003

TC 1700

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA, 22313-1450 on September 3, 2003

Mark A. Charles

Name of Attorney/Agent

51,547

Registration No.

Signature of Attorney/Agent

#12  
CMT  
10-8-03

P&G Case CM1882

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In the Application of: :  
Ceulemans *et al.* : **BEFORE THE BOARD OF APPEALS**  
Serial No.: 09/744,267 : Group Art Unit: 1751  
Filed: January 22, 2001 : Examiner: Gregory R. DELCOTTO  
Confirmation No.: 5069 :  
For FABRIC CARE COMPOSITIONS

**APPEAL BRIEF**

Mail Stop Appeal Brief- Patents

Commissioner for Patents

P.O. Box 1450

Alexandria, VA 22313-1450

Dear Sir:

Appellants appealed to the Board of Appeals by filing a Notice of Appeal, dated July 3, 2002 from the final rejection of Claims 1, 4-6, 8, 9, and 12-14, as contained in the final Office Action dated March 4, 2003 (Paper No. 8) of the Primary Examiner. The Commissioner is hereby authorized to charge any necessary fees to Deposit Account No. 16-2480. This Appeal Brief is being submitted in triplicate.

**(1) REAL PARTY IN INTEREST**

The real party in interest is The Procter & Gamble Company, a corporation of The State of Ohio, having a place of business at Cincinnati, Ohio 45202.

**(2) RELATED APPEALS AND INTERFERENCES**

There are no known related appeals or interferences.

**(3) STATUS OF CLAIMS**

Claims 1, 4-6, 8, 9, and 12-14 are pending and have been appealed. A copy of the appealed Claims 1, 4-6, 8, 9, and 12-14 is attached as APPENDIX I.

RECEIVED  
OCT 02 2003  
TC 1700

RECEIVED  
OCT 03 2003  
TC 1700

(4) **STATUS OF AMENDMENTS**

All amendments have been entered.

(5) **SUMMARY OF INVENTION**

The present invention relates to a fabric care composition comprising a nitrogen containing dye fixing agent, and a scum reducing agent selected from the group consisting of N,N dimethyl-N-(2-hydroxyethyl)-N-dodecyl/tetradecyl ammonium bromide, myristoyl choline ester quaternary methylammonium halides, lauroyl choline ester methylammonium halides, cocoyl choline ester quaternary methylammonium halides, a polyoxyalkylene alkyl amine surface active agent, and mixtures thereof. The utilization of the claimed group of scum reducing agents allows the utilization of a relatively broad range of dye fixing agents to provide a fabric care composition.

(6) **ISSUE**

Are Claims 1, 4-6, 8, 9, and 12-14 unobvious and patentable over WO 98/12295 under 35 U.S.C. § 103(a)?

A copy of the reference is attached as APPENDIX II.

(7) **GROUPING OF CLAIMS**

Claims 1, 4-6, 8, 9, and 12-14 stand or fall together.

(8) **ARGUMENT**

Are Claims 1, 4-6, 8, 9, and 12-14 unobvious and patentable over WO 98/12295 under 35 U.S.C. § 103(a)?

Claims 1, 4-6, 8, 9, and 12-14 remain rejected under 35 U.S.C. § 103(a) as being unpatentable over WO 98/12295 ("WO '295"). Appellants respectfully traverse this rejection.

WO '295 discloses a composition comprising a dye fixing agent and a specific amino-functional polymer. *See, e.g.*, WO '295, page 2, lines 5-7. It is an object of WO '295 to provide a composition that provides improved color appearance of the laundered fabrics. *See, e.g.*, Specification, page 1, lines 32-35. The amino-functional polymers of this composition are water-soluble or dispersible polyamines. *See, e.g.*, WO '295, page 2, lines 5 – page 4, line 12. Amino-functional polymers for use herein have a molecular weight of between 200 and 10<sup>6</sup>, preferably between 600 and 20,000, most preferably between 1,000 and 10,000. *See, e.g.*, WO '295, page 5, line 37 – page 6, line 2. The polyamines can have linear or cyclic and branched backbones. *See, e.g.*, WO '295, page 6, lines 2-4,

In contrast, the present invention relates to a fabric care composition comprising a nitrogen containing dye fixing agent, and a scum reducing agent selected from the group

consisting of N,N dimethyl-N-(2-hydroxyethyl)-N-dodecyl/tetradecyl ammonium bromide, myristoyl choline ester quaternary methylammonium halides, lauroyl choline ester methylammonium halides, cocoyl choline ester quaternary methylammonium halides, a polyoxyalkylene alkyl amine surface active agent, and mixtures thereof. WO '295 does not teach or suggest scum reducing agents selected from the group consisting of N,N dimethyl-N-(2-hydroxyethyl)-N-dodecyl/tetradecyl ammonium bromide, myristoyl choline ester quaternary methylammonium halides, lauroyl choline ester methylammonium halides, cocoyl choline ester quaternary methylammonium halides, a polyoxyalkylene alkyl amine surface active agent, and mixtures thereof.

There is no teaching or suggestion in WO '295 of compositions that can be used as scum reducing agents. The combination of a dye fixing agent and an aminofunctional polymer disclosed in WO '295 is used to provide improved color appearance of laundered fabrics. Nowhere in WO '295 is there mention of using the compositions as scum reducing agents. Further, WO '295 discloses a nearly limitless set of compositions that function as aminofunctional polymers. Thousands of aminofunctional polymers can be derived from the disclosure in WO '295. The aminofunctional polymers of WO '295 include materials having molecular weights of between 200 and  $10^6$ , having linear or cyclic, as well as branched backbones. In contrast, claim 1 teaches that composition selected from the group consisting of N,N dimethyl-N-(2-hydroxyethyl)-N-dodecyl/tetradecyl ammonium bromide, myristoyl choline ester quaternary methylammonium halides, lauroyl choline ester methylammonium halides, cocoyl choline ester quaternary methylammonium halides, a polyoxyalkylene alkyl amine surface active agent, and mixtures thereof, can be used as scum reducing agents. It would require a tremendous amount of effort and experimentation to derive the scum reducing agents of the present invention from the aminofunctional polymers disclosed in WO '295. Further, because, as discussed above, there is no teaching or suggestion of the use of aminofunctional polymers as scum reducing agents, there would be no motivation to apply the disclosure of WO '295 to solve the problem of scum reduction of the present invention.

In addition to there being no teaching or suggestion in WO '295 of compositions that can be used as scum reducing agents, the Office Action is improperly using hindsight to reject the claims as obvious. Hindsight cannot be used to reject the claims as obvious. *In re Sernaker*, 702 F.2d 989, 994 (Fed. Cir. 1983); *In re Rinehart*, 531 F.2d 1048 (CCPA 1976); *In re Imperato*, 486 F.2d 585 (CCPA 1973); *In re Adams*, 356 F.2d 998 (CCPA 1966). It is legally improper to select from the prior art the separate components of the inventor's combination, using the blueprint supplied by the inventor. *C.R. Bard Inc. v. M3 Systems, Inc.*, 157 F.3d 1340, 1352 (Fed. Cir. 1998) citing *Fromson v. Advance Offset Plate, Inc.*, 755 F.2d 1549, 1556 (Fed. Cir. 1985) (holding the prior art must suggest to one of ordinary skill in the art the desirability of the

claimed combination). The Office Action picks and chooses compositions from the vast disclosure of WO '295 in order to reject the claims. This selecting of claim elements results from hindsight and cannot be used to reject the claims as obvious.


Based on the above arguments, the Office Action has failed to establish a prima facie case of obviousness. Therefore, Appellants respectfully submit that the presently claimed invention is unobvious and patentable over WO '295 under 35 U.S.C. §103(a). Appellants respectfully request reversal of this rejection.

In view of the foregoing remarks, it is respectfully submitted that all claims are allowable. Accordingly, Appellants respectfully request reversal of all rejections.

Respectfully submitted,

R. A. A. CEULEMANS ET AL.

By

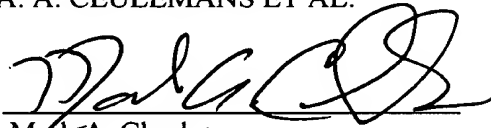

Mark A. Charles  
Attorney for Appellant(s)  
Registration No. 51,547  
(513) 627-8150

Dated: September 3, 2003  
Customer Number 27752

## APPENDIX I

### Appealed Claims – Case CM1882

1- A fabric care composition comprising:


i)- a nitrogen containing dye fixing agent, and

ii)- a scum reducing agent selected from the group consisting of N,N dimethyl-N-(2-hydroxyethyl)-N-dodecyl/tetradecyl ammonium bromide, myristoyl choline ester quaternary methylammonium halides, lauroyl choline ester methylammonium halides, cocoyl choline ester quaternary methylammonium halides, a polyoxyalkylene alkyl amine surface active agent, and mixtures thereof.


2- (Cancelled)

3- (Cancelled)


4- A composition according to Claim 3, wherein the polyoxyalkylene alkyl amine surface active agent has the formula:



wherein R is selected from C<sub>7</sub>-C<sub>21</sub> linear alkyl, C<sub>7</sub>-C<sub>21</sub> branched alkyl, C<sub>7</sub>-C<sub>21</sub> linear alkenyl, C<sub>7</sub>-C<sub>21</sub> branched alkenyl, and mixtures thereof; R<sup>1</sup> is ethylene; R<sup>2</sup> is selected from C<sub>3</sub>-C<sub>4</sub> linear alkyl, C<sub>3</sub>-C<sub>4</sub> branched alkyl, and mixtures thereof; R<sup>3</sup> is selected from hydrogen, C<sub>1</sub>-C<sub>4</sub> linear alkyl, C<sub>3</sub>-C<sub>4</sub> branched alkyl, and mixtures thereof; R<sup>4</sup> is selected from hydrogen, C<sub>1</sub>-C<sub>4</sub> linear



alkyl, C<sub>3</sub>-C<sub>4</sub> branched alkyl, and mixtures thereof; A is



R<sup>5</sup> is selected from -[(R<sup>1</sup>O)<sub>x</sub>(R<sup>2</sup>O)<sub>y</sub>] unit, C<sub>1</sub>-C<sub>16</sub> linear alkyl, C<sub>1</sub>-C<sub>16</sub> branched alkyl, C<sub>1</sub>-C<sub>16</sub> linear alkenyl, C<sub>1</sub>-C<sub>16</sub> branched alkenyl, and mixtures thereof;

wherein the index m is 1 or 2, the index n is 0 or 1, provided that when m is equal to 1, n is equal to 1; and when m is 2 n is 0;

wherein the index x is from 0 to about 50, preferably from 1 to 25,

wherein the index y is from 0 to about 10;

wherein the index q is 0 or 1.

5- A composition according to Claim 4, wherein said index x is from 1 to 25.

6- A composition according to Claim 5, wherein said index m is equal to 2 and n is equal to 0.

7- (Cancelled)

8- A composition according to Claim 7, wherein said dye fixing agent is a cellulose reactive dye fixing agent.

9- A composition according to Claim 8, wherein the nitrogen containing compound is of from 1% to 25% by weight of the composition.


10- (Cancelled)

11- (Cancelled)


12- A composition according to Claim 9 wherein the nitrogen containing compound is of from 1% to 10% active by weight of the composition.

13- A composition according to Claim 1, wherein said composition further comprises a polyamino-functional polymer.

14- A composition according to Claim 13, wherein said polymer comprises a polyamine backbone corresponding to the formula:




having a polyamine formula  $V_{(n+1)}W_mY_nZ$  or a polyamine backbone corresponding to the formula:






having a polyamine formula  $V_{(n-k+1)}W_mY_nY'_kZ$ , wherein  $k$  is less than or equal to  $n$ , said polyamine backbone has a molecular weight greater than 200 daltons, wherein


i) V units are terminal units having the formula:




ii) W units are backbone units having the formula:




iii) Y units are branching units having the formula:



iv) Y' units are branch point for a backbone or branch ring having the formula:



v) Z units are terminal units having the formula:



wherein backbone linking R units are selected from the group consisting of C<sub>2</sub>-C<sub>12</sub> alkylene, C<sub>4</sub>-C<sub>12</sub> alkenylene, C<sub>3</sub>-C<sub>12</sub> hydroxyalkylene, C<sub>4</sub>-C<sub>12</sub> dihydroxy-alkylene, C<sub>8</sub>-C<sub>12</sub> dialkylarylene, - (R<sup>1</sup>O)<sub>x</sub>R<sup>1</sup>-, -(R<sup>1</sup>O)<sub>x</sub>R<sup>5</sup>(OR<sup>1</sup>)<sub>x</sub>-, -(CH<sub>2</sub>CH(OR<sup>2</sup>)CH<sub>2</sub>O)<sub>z</sub>(R<sup>1</sup>O)<sub>y</sub>R<sup>1</sup>(OCH<sub>2</sub>CH(OR<sup>2</sup>)CH<sub>2</sub>)<sub>w</sub>-, -C(O)(R<sup>4</sup>)<sub>r</sub>C(O)-, -CH<sub>2</sub>CH(OR<sup>2</sup>)CH<sub>2</sub>-, and mixtures thereof; wherein R<sup>1</sup> is selected from the group consisting of C<sub>2</sub>-C<sub>6</sub> alkylene and mixtures thereof; R<sup>2</sup> is selected from the group consisting of hydrogen, -(R<sup>1</sup>O)<sub>x</sub>B, and mixtures thereof; R<sup>4</sup> is selected from the group consisting of C<sub>1</sub>-C<sub>12</sub> alkylene, C<sub>4</sub>-C<sub>12</sub> alkenylene, C<sub>8</sub>-C<sub>12</sub> arylalkylene, C<sub>6</sub>-C<sub>10</sub> arylene, and mixtures thereof; R<sup>5</sup> is selected from the group consisting of C<sub>1</sub>-C<sub>12</sub> alkylene, C<sub>3</sub>-C<sub>12</sub> hydroxyalkylene, C<sub>4</sub>-C<sub>12</sub> dihydroxy-alkylene, C<sub>8</sub>-C<sub>12</sub> dialkylarylene, -C(O)-, -C(O)NHR<sup>6</sup>NHC(O)-, -R<sup>1</sup>(OR<sup>1</sup>)-, -C(O)(R<sup>4</sup>)<sub>r</sub>C(O)-, -CH<sub>2</sub>CH(OH)CH<sub>2</sub>-, -CH<sub>2</sub>CH(OH)CH<sub>2</sub>O(R<sup>1</sup>O)<sub>y</sub>R<sup>1</sup>OCH<sub>2</sub>CH(OH)CH<sub>2</sub>-, and mixtures thereof; R<sup>6</sup> is selected from the

group consisting of C<sub>2</sub>-C<sub>12</sub> alkylene or C<sub>6</sub>-C<sub>12</sub> arylene; R' units are selected from the group consisting of hydrogen, C<sub>1</sub>-C<sub>22</sub> alkyl, C<sub>3</sub>-C<sub>22</sub> alkenyl, C<sub>7</sub>-C<sub>22</sub> arylalkyl, C<sub>2</sub>-C<sub>22</sub> hydroxyalkyl, -(CH<sub>2</sub>)<sub>p</sub>CO<sub>2</sub>M, -(CH<sub>2</sub>)<sub>q</sub>SO<sub>3</sub>M, -CH(CH<sub>2</sub>CO<sub>2</sub>M)CO<sub>2</sub>M, -(CH<sub>2</sub>)<sub>p</sub>PO<sub>3</sub>M, -(R<sup>1</sup>O)<sub>x</sub>B, -C(O)R<sup>3</sup>, and mixtures thereof; B is selected from the group consisting of hydrogen, C<sub>1</sub>-C<sub>6</sub> alkyl, -(CH<sub>2</sub>)<sub>q</sub>SO<sub>3</sub>M, -(CH<sub>2</sub>)<sub>p</sub>CO<sub>2</sub>M, -(CH<sub>2</sub>)<sub>q</sub>(CHSO<sub>3</sub>M)CH<sub>2</sub>SO<sub>3</sub>M, -(CH<sub>2</sub>)<sub>q</sub>-(CHSO<sub>2</sub>M)CH<sub>2</sub>SO<sub>3</sub>M, -(CH<sub>2</sub>)<sub>p</sub>PO<sub>3</sub>M, -PO<sub>3</sub>M, and mixtures thereof; R<sup>3</sup> is selected from the group consisting of C<sub>1</sub>-C<sub>18</sub> alkyl, C<sub>7</sub>-C<sub>12</sub> arylalkyl, C<sub>7</sub>-C<sub>12</sub> alkyl substituted aryl, C<sub>6</sub>-C<sub>12</sub> aryl, and mixtures thereof; M is hydrogen or a water soluble cation in sufficient amount to satisfy charge balance; X is a water soluble anion; m has the value from 2 to 700; n has the value from 0 to 350; p has the value from 1 to 6, q has the value from 0 to 6; r has the value of 0 or 1; w has the value 0 or 1; x has the value from 1 to 100; y has the value from 0 to 100; z has the value 0 or 1.

## **APPENDIX II**

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification<sup>6</sup> : <b>C11D 3/37, 3/00, 1/62</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 98/12295</b> (43) International Publication Date: <b>26 March 1998 (26.03.98)</b></p>
<p>(21) International Application Number: <b>PCT/US96/15052</b> (22) International Filing Date: <b>19 September 1996 (19.09.96)</b> (71) Applicant (for all designated States except US): <b>THE PROCTER &amp; GAMBLE COMPANY [US/US]; One Procter &amp; Gamble Plaza, Cincinnati, OH 45202 (US).</b> (72) Inventors; and (75) Inventors/Applicants (for US only): <b>LEURENTOP, Linda, Josefina, Anna [BE/BE]; De Beemdekens 7, B-2980 Zoersel (BE). LITTIG, Janet, Sue [US/US]; 159 Hidden Hills Drive, Fairfield, OH 45014 (US). MASSCHELEIN, Axel [BE/BE]; Bofte 4, Rue Victor Allard 50, B-1180 Brussels (BE).</b> (74) Agents: <b>REED, T., David et al.; The Procter &amp; Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US).</b></p>		<p>(81) Designated States: <b>AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</b></p> <p><b>Published</b> <i>With international search report.</i></p>
<p>(54) Title: <b>COLOR CARE COMPOSITIONS</b> (57) Abstract <p>The present invention is a composition comprising a dye fixing agent and a specific amino-functional polymer, said composition providing an improved color care on fabrics upon laundry treatments.</p></p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**Color care compositions**

5

10

Field of the invention

15

The present invention relates to compositions which provide care to the colors of fabrics in laundry treatment.

20

Background of the invention

25

The appearance of colored fabrics, e.g., clothing, bedding, household fabrics like table linens is one of the areas of concern to consumers. Indeed, upon typical consumer's uses of the fabrics such as wearing, washing, rinsing and/or tumble-drying of fabrics, a loss in the fabric appearance, which is at least partly due to loss of color fidelity and color definition, is observed. Such a problem of color loss is even more acute in laundry treatment after multiwash cycles.

30


It is therefore an object of the invention to provide a composition which provides improved color appearance of the laundered fabrics, especially after multiwash cycles.

35


The Applicant has now surprisingly found that the combination of a dye fixing agent and an amino-functional polymer overcomes the problem.

Summary of the invention

- 5 The present invention is a composition comprising a dye fixing agent and an amino-functional polymer comprising a polyamine backbone corresponding to the formula:




having a polyamine formula  $V_{(n+1)}W_mY_nZ$  or a polyamine backbone corresponding to the formula:

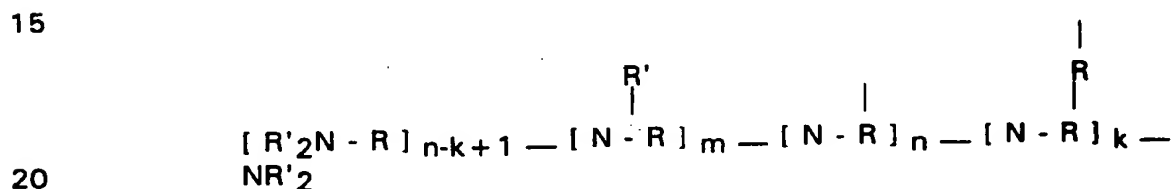


- 25 having a polyamine formula  $V_{(n-k+1)}W_mY_nY'_kZ$ , wherein k is less than or equal to n, said polyamine backbone has a molecular weight greater than 200 daltons, wherein


i) V units are terminal units having the formula:

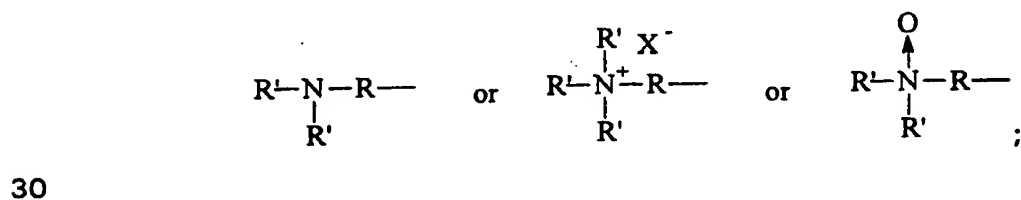

ii) W units are backbone units having the formula:




iii) Y units are branching units having the formula:




5

iv) Y' units are branch point for a backbone or branch ring having the formula:



10

v) Z units are terminal units having the formula:



- 15 wherein backbone linking R units are selected from the group consisting of C<sub>2</sub>-C<sub>12</sub> alkylene, C<sub>4</sub>-C<sub>12</sub> alkenylene, C<sub>3</sub>-C<sub>12</sub> hydroxyalkylene, C<sub>4</sub>-C<sub>12</sub> dihydroxyalkylene, C<sub>8</sub>-C<sub>12</sub> dialkylarylene, -(R<sup>1</sup>O)<sub>x</sub>R<sup>1</sup>-, -(R<sup>1</sup>O)<sub>x</sub>R<sup>5</sup>(OR<sup>1</sup>)<sub>x</sub>-, -(CH<sub>2</sub>CH(OR<sup>2</sup>)CH<sub>2</sub>O)<sub>z</sub>(R<sup>1</sup>O)<sub>y</sub>R<sup>1</sup>(OCH<sub>2</sub>CH(OR<sup>2</sup>)CH<sub>2</sub>)<sub>w</sub>-, -C(O)(R<sup>4</sup>)<sub>r</sub>C(O)-, -CH<sub>2</sub>CH(OR<sup>2</sup>)CH<sub>2</sub>-, and mixtures thereof; wherein R<sup>1</sup> is selected from the
- 20 group consisting of C<sub>2</sub>-C<sub>6</sub> alkylene and mixtures thereof; R<sup>2</sup> is selected from the group consisting of hydrogen, -(R<sup>1</sup>O)<sub>x</sub>B, and mixtures thereof; R<sup>4</sup> is selected from the group consisting of C<sub>1</sub>-C<sub>12</sub> alkylene, C<sub>4</sub>-C<sub>12</sub> alkenylene, C<sub>8</sub>-C<sub>12</sub> arylalkylene, C<sub>6</sub>-C<sub>10</sub> arylene, and mixtures thereof; R<sup>5</sup> is selected from the group consisting of C<sub>1</sub>-C<sub>12</sub> alkylene, C<sub>3</sub>-C<sub>12</sub>
- 25 hydroxyalkylene, C<sub>4</sub>-C<sub>12</sub> dihydroxy-alkylene, C<sub>8</sub>-C<sub>12</sub> dialkylarylene, -C(O)-, -C(O)NHR<sup>6</sup>NHC(O)-, -R<sup>1</sup>(OR<sup>1</sup>)-, -C(O)(R<sup>4</sup>)<sub>r</sub>C(O)-, -CH<sub>2</sub>CH(OH)CH<sub>2</sub>-, -CH<sub>2</sub>CH(OH)CH<sub>2</sub>O(R<sup>1</sup>O)<sub>y</sub>R<sup>1</sup>OCH<sub>2</sub>CH(OH)CH<sub>2</sub>-, and mixtures thereof; R<sup>6</sup> is selected from the group consisting of C<sub>2</sub>-C<sub>12</sub> alkylene or C<sub>6</sub>-C<sub>12</sub> arylene; R' units are selected from the group consisting of hydrogen, C<sub>1</sub>-C<sub>22</sub> alkyl,
- 30 C<sub>3</sub>-C<sub>22</sub> alkenyl, C<sub>7</sub>-C<sub>22</sub> arylalkyl, C<sub>2</sub>-C<sub>22</sub> hydroxyalkyl, -(CH<sub>2</sub>)<sub>p</sub>CO<sub>2</sub>M



,  $-(CH_2)_qSO_3M$ ,  $-CH(CH_2CO_2M)CO_2M$ ,  $-(CH_2)_pPO_3M$ ,  $-(R^1O)_xB$ ,  $-C(O)R^3$ , and mixtures thereof; oxide; B is selected from the group consisting of hydrogen, C<sub>1</sub>-C<sub>6</sub> alkyl,  $-(CH_2)_qSO_3M$ ,  $-(CH_2)_pCO_2M$ ,  $-(CH_2)_q(CHSO_3M)CH_2SO_3M$ ,  $-(CH_2)_q-(CHSO_2M)CH_2SO_3M$ ,  $-(CH_2)_pPO_3M$ ,  $-PO_3M$ , and mixtures thereof; R<sup>3</sup> is selected from the group consisting of C<sub>1</sub>-C<sub>18</sub> alkyl, C<sub>7</sub>-C<sub>12</sub> arylalkyl, C<sub>7</sub>-C<sub>12</sub> alkyl substituted aryl, C<sub>6</sub>-C<sub>12</sub> aryl, and mixtures thereof; M is hydrogen or a water-soluble cation in sufficient amount to satisfy charge balance; X is a water-soluble anion; m has the value from 2 to 700; n has the value from 0 to 350; p has the value from 1 to 6, q has the value from 0 to 6; r has the value of 0 or 1; w has the value 0 or 1; x has the value from 1 to 100; y has the value from 0 to 100; z has the value 0 or 1.

In a preferred embodiment of the invention, the composition further comprises a fabric softener component.

In another aspect of the invention, there is provided a method for providing color care to fabrics upon domestic laundering treatments which comprise the step of contacting the fabrics with an aqueous medium comprising said composition.

In a further aspect, there is provided a method for providing color care on treated fabrics upon domestic treatment which comprises the step of contacting the fabrics with said composition, wherein said composition is applied on a substrate, preferably a dryer-sheet.

#### Detailed description of the invention

30

##### Dye fixing agent

An essential component of the invention is a dye fixing agent. Dye fixing agents, or "fixatives", are well-known, commercially available materials which are designed to improve the appearance of dyed fabrics by minimizing the loss of dye from fabrics due to washing. Not included within

35

this definition are components which are fabric softeners or those described hereinafter as amino-functional polymers.

Many dye fixing agents are cationic, and are based on various quaternized or otherwise cationically charged organic nitrogen compounds. Cationic fixatives are available under various trade names from several suppliers. Representative examples include: CROSCOLOR PMF (July 1981, Code No. 7894) and CROSCOLOR NOFF (January 1988, Code No. 8544) from Crosfield; INDOSOL E-50 (February 27, 1984, Ref. No. 6008.35.84; polyethyleneamine-based) from Sandoz; SANDOFIX TPS, which is also available from Sandoz and is a preferred polycationic fixative for use herein and SANDOFIX SWE (cationic resinous compound), REWIN SRF, REWIN SRF-O and REWIN DWR from CHT-Beitlich GMBH, Tinofix® ECO, Tinofix® FRD and Solfin® available from Ciba-Geigy.

Other cationic dye fixing agents are described in "Aftertreatments for improving the fastness of dyes on textile fibres" by Christopher C. Cook (REV. PROG. COLORATION Vol. 12, 1982). Dye fixing agents suitable for use in the present invention are ammonium compounds such as fatty acid - diamine condensates e.g. the hydrochloride, acetate, metosulphate and benzyl hydrochloride of oleyldiethyl aminoethylamide, oleylmethyl-diethylenediaminemethosulphate, monostearyl-ethylene diaminotrimethylammonium methosulphate and oxidized products of tertiary amines; derivatives of polymeric alkyldiamines, polyamine-cyanuric chloride condensates and aminated glycerol dichlorohydrins.

A typical amount of the dye fixing agent to be employed in the composition of the invention is preferably up to 90% by weight, preferably up to 50% by weight, more preferably from 0.001% to 10% by weight, most preferably from 0.5% to 5% active by weight of the composition.

#### Amino-functional polymer

The other essential component of the invention is an amino-functional polymer comprising a polyamine backbone. The amino-functional polymers of the present invention are water-soluble or dispersible, polyamines. Typically, the amino-functional polymers for use herein have a molecular


weight between 200 and  $10^6$ , preferably between 600 and 20,000, most preferably between 1000 and 10,000. These polyamines comprise backbones that can be either linear or cyclic. The polyamine backbones can also comprise polyamine branching chains to a greater or lesser degree.

5 Preferably, the polyamine backbones described herein are modified in such a manner that at least each nitrogen of the polyamine chain is thereafter described in terms of a unit that is substituted, quaternized, oxidized, or combinations thereof.

10 For the purposes of the present invention the term "modification" as it relates to the chemical structure of the polyamines is defined as replacing a backbone -NH hydrogen atom by an R' unit (substitution), quaternizing a backbone nitrogen (quaternized) or oxidizing a backbone nitrogen to the N-oxide (oxidized). The terms "modification" and "substitution" are used  
15 interchangeably when referring to the process of replacing a hydrogen atom attached to a backbone nitrogen with an R' unit. Quaternization or oxidation may take place in some circumstances without substitution, but substitution is preferably accompanied by oxidation or quaternization of at least one backbone nitrogen.


20

The linear or non-cyclic polyamine backbones that comprise the amino-functional polymer have the general formula:




The cyclic polyamine backbones that comprise the amino-functional polymer have the general formula:

30

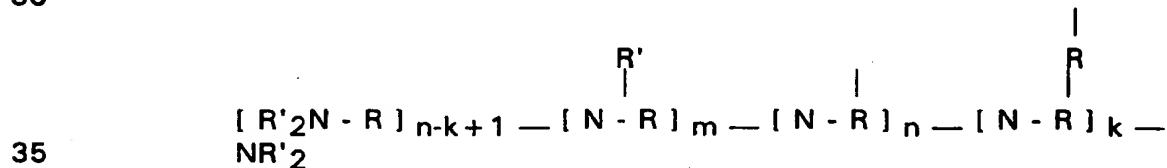

The above backbones prior to optional but preferred subsequent modification, comprise primary, secondary and tertiary amine nitrogens connected by R "linking" units.

For the purpose of the present invention, primary amine nitrogens comprising the backbone or branching chain once modified are defined as V or Z "terminal" units. For example, when a primary amine moiety, located at the end of the main polyamine backbone or branching chain having the structure




is modified according to the present invention, it is thereafter defined as a V "terminal" unit, or simply a V unit. However, for the purposes of the present invention, some or all of the primary amine moieties can remain unmodified subject to the restrictions further described herein below. These unmodified primary amine moieties by virtue of their position in the backbone chain remain "terminal" units. Likewise, when a primary amine moiety, located at the end of the main polyamine backbone having the structure



is modified according to the present invention, it is thereafter defined as a Z "terminal" unit, or simply a Z unit. This unit can remain unmodified subject to the restrictions further described hereinbelow.

In a similar manner, secondary amine nitrogens comprising the backbone or branching chain once modified are defined as W "backbone" units. For example, when a secondary amine moiety, the major constituent of the backbones and branching chains of the present invention, having the structure



is modified according to the present invention, it is thereafter defined as a W "backbone" unit, or simply a W unit. However, for the purposes of the present invention, some or all of the secondary amine moieties can remain

unmodified. These unmodified secondary amine moieties by virtue of their position in the backbone chain remain "backbone" units.


In a further similar manner, tertiary amine nitrogens comprising the backbone or branching chain once modified are further referred to as Y "branching" units. For example, when a tertiary amine moiety, which is a chain branch point of either the polyamine backbone or other branching chains or rings, having the structure



10 is modified according to the present invention, it is thereafter defined as a Y "branching" unit, or simply a Y unit. However, for the purposes of the present invention, some or all of the tertiary amine moieties can remain unmodified. These unmodified tertiary amine moieties by virtue of their position in the backbone chain remain "branching" units. The R units  
15 associated with the V, W and Y unit nitrogens which serve to connect the polyamine nitrogens, are described hereinbelow.

The final modified structure of the polyamines of the present invention can therefore be represented by the general formula

20




for linear amino-functional polymer and by the general formula

25




for cyclic amino-functional polymer. For the case of polyamines comprising rings, a Y' unit of the formula

30



serves as a branch point for a backbone or branch ring. For every Y' unit there is a Y unit having the formula



that will form the connection point of the ring to the main polymer chain or branch. In the unique case where the backbone is a complete ring, the polyamine backbone has the formula



therefore comprising no Z terminal unit and having the formula



wherein k is the number of ring forming branching units. Preferably the polyamine backbones of the present invention comprise no rings.

In the case of non-cyclic polyamines, the ratio of the index n to the index m relates to the relative degree of branching. A fully non-branched linear modified polyamine according to the present invention has the formula




that is, n is equal to 0. The greater the value of n (the lower the ratio of m to n), the greater the degree of branching in the molecule. Typically, the value for m ranges from a minimum value of 2 to 700, preferably 4 to 400, however, larger values of m are also preferred, especially when the value of the index n is very low or nearly 0.

Each polyamine nitrogen whether primary, secondary or tertiary, once modified according to the present invention, is further defined as being a member of one of three general classes; simple substituted, quaternized or oxidized. Those polyamine nitrogen units not modified are classed into V, W, Y, Y' or Z units depending on whether they are primary, secondary or tertiary nitrogens. That is unmodified primary amine nitrogens are V or Z units, unmodified secondary amine nitrogens are W units or Y' units and


unmodified tertiary amine nitrogens are Y units for the purposes of the present invention.

Modified primary amine moieties are defined as V "terminal" units having one of three forms:

a) simple substituted units having the structure:




b) quaternized units having the structure:




wherein X is a suitable counter ion providing charge balance; and

c) oxidized units having the structure:




Modified secondary amine moieties are defined as W "backbone" units having one of three forms:

a) simple substituted units having the structure:




b) quaternized units having the structure:



wherein X is a suitable counter ion providing charge balance; and


- 5 c) oxidized units having the structure:




Other modified secondary amine moieties are defined as Y' units having one of three forms:

10

- a) simple substituted units having the structure:




- 15 b) quaternized units having the structure:



wherein X is a suitable counter ion providing charge balance; and

20

- c) oxidized units having the structure:




- 25 Modified tertiary amine moieties are defined as Y "branching" units having one of three forms:



- a) unmodified units having the structure:




- 5 b) quaternized units having the structure:




wherein X is a suitable counter ion providing charge balance; and

- 10 c) oxidized units having the structure:




- 15 Certain modified primary amine moieties are defined as Z "terminal" units having one of three forms:

- a) simple substituted units having the structure:



20


- b) quaternized units having the structure:



25

wherein X is a suitable counter ion providing charge balance; and


- c) oxidized units having the structure:



When any position on a nitrogen is unsubstituted or unmodified, it is understood that hydrogen will substitute for R'. For example, a primary amine unit comprising one R' unit in the form of a hydroxyethyl moiety is a V terminal unit having the formula (HOCH<sub>2</sub>CH<sub>2</sub>)HN-.

For the purposes of the present invention there are two types of chain terminating units, the V and Z units. The Z "terminal" unit derives from a terminal primary amino moiety of the structure -NH<sub>2</sub>. Non-cyclic polyamine backbones according to the present invention comprise only one Z unit whereas cyclic polyamines can comprise no Z units. The Z "terminal" unit can be substituted with any of the R' units described further herein below, except when the Z unit is modified to form an N-oxide. In the case where the Z unit nitrogen is oxidized to an N-oxide, the nitrogen must be modified and therefore R' cannot be a hydrogen.

The polyamines of the present invention comprise backbone R "linking" units that serve to connect the nitrogen atoms of the backbone. R units comprise units that for the purposes of the present invention are referred to as "hydrocarbyl R" units and "oxy R" units. The "hydrocarbyl" R units are C<sub>2</sub>-C<sub>12</sub> alkylene, C<sub>4</sub>-C<sub>12</sub> alkenylene, C<sub>3</sub>-C<sub>12</sub> hydroxyalkylene wherein the hydroxyl moiety may take any position on the R unit chain except the carbon atoms directly connected to the polyamine backbone nitrogens; C<sub>4</sub>-C<sub>12</sub> dihydroxyalkylene wherein the hydroxyl moieties may occupy any two of the carbon atoms of the R unit chain except those carbon atoms directly connected to the polyamine backbone nitrogens; C<sub>8</sub>-C<sub>12</sub> dialkylarylene which for the purpose of the present invention are arylene moieties having two alkyl substituent groups as part of the linking chain. For example, a dialkylarylene unit has the formula



- although the unit need not be 1,4-substituted, but can also be 1,2 or 1,3 substituted C<sub>2</sub>-C<sub>12</sub> alkylene, preferably ethylene, 1,2-propylene, and mixtures thereof, more preferably ethylene. The "oxy" R units comprise -
- 5 (R<sup>1</sup>O)<sub>x</sub>R<sup>5</sup>(OR<sup>1</sup>)<sub>x</sub>-, -CH<sub>2</sub>CH(OR<sup>2</sup>)CH<sub>2</sub>O)<sub>z</sub>(R<sup>1</sup>O)<sub>y</sub>R<sup>1</sup>(OCH<sub>2</sub>CH(OR<sup>2</sup>)CH<sub>2</sub>)<sub>w</sub>-, -CH<sub>2</sub>CH(OR<sup>2</sup>)CH<sub>2</sub>-, (R<sup>1</sup>O)<sub>x</sub>R<sup>1</sup>-, and mixtures thereof. Preferred R units are selected from the group consisting of C<sub>2</sub>-C<sub>12</sub> alkylene, C<sub>3</sub>-C<sub>12</sub> hydroxyalkylene, C<sub>4</sub>-C<sub>12</sub> dihydroxyalkylene, C<sub>8</sub>-C<sub>12</sub> dialkylarylene, -
- 10 (R<sup>1</sup>O)<sub>x</sub>R<sup>1</sup>-, -CH<sub>2</sub>CH(OR<sup>2</sup>)CH<sub>2</sub>-, -(CH<sub>2</sub>CH(OH)CH<sub>2</sub>O)<sub>z</sub>(R<sup>1</sup>O)<sub>y</sub>R<sup>1</sup>(OCH<sub>2</sub>CH(OH)CH<sub>2</sub>)<sub>w</sub>-, (R<sup>1</sup>O)<sub>x</sub>R<sup>5</sup>(OR<sup>1</sup>)<sub>x</sub>-, more preferred R units are C<sub>2</sub>-C<sub>12</sub> alkylene, C<sub>3</sub>-C<sub>12</sub> hydroxy-alkylene, C<sub>4</sub>-C<sub>12</sub> dihydroxyalkylene, - (R<sup>1</sup>O)<sub>x</sub>R<sup>1</sup>-, (R<sup>1</sup>O)<sub>x</sub>R<sup>5</sup>(OR<sup>1</sup>)<sub>x</sub>-, - (CH<sub>2</sub>CH(OH)CH<sub>2</sub>O)<sub>z</sub>(R<sup>1</sup>O)<sub>y</sub>R<sup>1</sup>(OCH<sub>2</sub>CH(OH)CH<sub>2</sub>)<sub>w</sub>-, and mixtures thereof,
- 15 even more preferred R units are C<sub>2</sub>-C<sub>12</sub> alkylene, C<sub>3</sub> hydroxyalkylene, and mixtures thereof, most preferred are C<sub>2</sub>-C<sub>6</sub> alkylene.

The most preferred backbones of the present invention comprise at least 50% R units that are ethylene.

20

R<sup>1</sup> units are C<sub>2</sub>-C<sub>6</sub> alkylene, and mixtures thereof, preferably ethylene.

R<sup>2</sup> is hydrogen, and -(R<sup>1</sup>O)<sub>x</sub>B, preferably hydrogen.

- 25 R<sup>3</sup> is C<sub>1</sub>-C<sub>18</sub> alkyl, C<sub>7</sub>-C<sub>12</sub> arylalkylene, C<sub>7</sub>-C<sub>12</sub> alkyl substituted aryl, C<sub>6</sub>-C<sub>12</sub> aryl, and mixtures thereof, preferably C<sub>1</sub>-C<sub>12</sub> alkyl, C<sub>7</sub>-C<sub>12</sub> arylalkylene, more preferably C<sub>1</sub>-C<sub>12</sub> alkyl, most preferably methyl. R<sup>3</sup> units serve as part of R' units described herein below.

- 30 R<sup>4</sup> is C<sub>1</sub>-C<sub>12</sub> alkylene, C<sub>4</sub>-C<sub>12</sub> alkenylene, C<sub>8</sub>-C<sub>12</sub> arylalkylene, C<sub>6</sub>-C<sub>10</sub> arylene, preferably C<sub>1</sub>-C<sub>10</sub> alkylene, C<sub>8</sub>-C<sub>12</sub> arylalkylene, more preferably C<sub>2</sub>-C<sub>8</sub> alkylene, most preferably ethylene or butylene.

- 35 R<sup>5</sup> is C<sub>1</sub>-C<sub>12</sub> alkylene, C<sub>3</sub>-C<sub>12</sub> hydroxyalkylene, C<sub>4</sub>-C<sub>12</sub> dihydroxyalkylene, C<sub>8</sub>-C<sub>12</sub> dialkylarylene, -C(O)-, -C(O)NHR<sup>6</sup>NHC(O)-, -

$C(O)(R^4)_rC(O)-$ ,  $-R^1(OR^1)-$ ,  
 $CH_2CH(OH)CH_2O(R^1O)_yR^1OCH_2CH(OH)CH_2-$ ,  $-C(O)(R^4)_rC(O)-$ ,  
 $CH_2CH(OH)CH_2-$ ,  $R^5$  is preferably ethylene,  $-C(O)-$ ,  $-C(O)NHR^6NHC(O)-$ ,  
 $-R^1(OR^1)-$ ,  $-CH_2CH(OH)CH_2-$ ,  $-CH_2CH(OH)CH_2O(R^1O)_yR^1OCH_2CH-$   
 5  $(OH)CH_2-$ , more preferably  $-CH_2CH(OH)CH_2-$ .

$R^6$  is  $C_2$ - $C_{12}$  alkylene or  $C_6$ - $C_{12}$  arylene.

10 The preferred "oxy" R units are further defined in terms of the  $R^1$ ,  $R^2$ , and  $R^5$  units. Preferred "oxy" R units comprise the preferred  $R^1$ ,  $R^2$ , and  $R^5$  units. The preferred cotton soil release agents of the present invention comprise at least 50%  $R^1$  units that are ethylene. Preferred  $R^1$ ,  $R^2$ , and  $R^5$  units are combined with the "oxy" R units to yield the preferred "oxy" R units in the following manner.


- 15 i) Substituting more preferred  $R^5$  into  $-(CH_2CH_2O)_xR^5(OCH_2CH_2)_x-$  yields  $-(CH_2CH_2O)_xCH_2CHOHCH_2(OCH_2CH_2)_x-$ .  
 20 ii) Substituting preferred  $R^1$  and  $R^2$  into  $-(CH_2CH(OR^2)CH_2O)_z-(R^1O)_yR^1O(CH_2CH(OR^2)CH_2)_w-$  yields  $-(CH_2CH(OH)CH_2O)_z-(CH_2CH_2O)_yCH_2CH_2O(CH_2CH(OH)CH_2)_w-$ .  
 25 iii) Substituting preferred  $R^2$  into  $-CH_2CH(OR^2)CH_2-$  yields  $-CH_2CH(OH)CH_2-$ .

25  $R'$  units are selected from the group consisting of hydrogen,  $C_1$ - $C_{22}$  alkyl,  $C_3$ - $C_{22}$  alkenyl,  $C_7$ - $C_{22}$  arylalkyl,  $C_2$ - $C_{22}$  hydroxyalkyl,  $-(CH_2)_pCO_2M$ ,  $-(CH_2)_qSO_3M$ ,  $-CH(CH_2CO_2M)CO_2M$ ,  $-(CH_2)_pPO_3M$ ,  $-(R^1O)_mB$ ,  $-C(O)R^3$ , preferably hydrogen,  $C_2$ - $C_{22}$  hydroxyalkylene, benzyl,  $C_1$ - $C_{22}$  alkylene,  $-(R^1O)_mB$ ,  $-C(O)R^3$ ,  $-(CH_2)_pCO_2M$ ,  $-(CH_2)_qSO_3M$ ,  $-CH(CH_2CO_2M)CO_2M$ ,  
 30 more preferably  $C_1$ - $C_{22}$  alkylene,  $-(R^1O)_xB$ ,  $-C(O)R^3$ ,  $-(CH_2)_pCO_2M$ ,  $-(CH_2)_qSO_3M$ ,  $-CH(CH_2CO_2M)CO_2M$ , most preferably  $C_1$ - $C_{22}$  alkylene,  $-(R^1O)_xB$ , and  $-C(O)R^3$ . When no modification or substitution is made on a nitrogen then the hydrogen atom will remain as the moiety representing  $R'$ .

35


R' units do not comprise a hydrogen atom when the V, W or Z units are oxidized, that is the nitrogens are N-oxides. For example, the backbone chain or branching chains do not comprise units of the following structure:

5



Additionally, R' units do not comprise carbonyl moieties directly bonded to a nitrogen atom when the V, W or Z units are oxidized, that is, the nitrogens are N-oxides. According to the present invention, the R' unit -C(O)R<sup>3</sup> moiety is not bonded to an N-oxide modified nitrogen, that is, there are no N-oxide amides having the structure

10

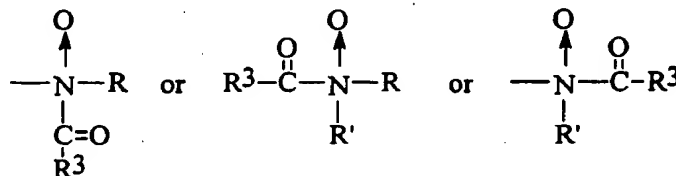

15

or combinations thereof.

B is hydrogen, C<sub>1</sub>-C<sub>6</sub> alkyl, -(CH<sub>2</sub>)<sub>q</sub>SO<sub>3</sub>M, -(CH<sub>2</sub>)<sub>p</sub>CO<sub>2</sub>M, -(CH<sub>2</sub>)<sub>q</sub>-(CHSO<sub>3</sub>M)CH<sub>2</sub>SO<sub>3</sub>M, -(CH<sub>2</sub>)<sub>q</sub>(CHSO<sub>2</sub>M)CH<sub>2</sub>SO<sub>3</sub>M, -(CH<sub>2</sub>)<sub>p</sub>PO<sub>3</sub>M, -PO<sub>3</sub>M, preferably hydrogen, -(CH<sub>2</sub>)<sub>q</sub>SO<sub>3</sub>M, -(CH<sub>2</sub>)<sub>q</sub>(CHSO<sub>3</sub>M)CH<sub>2</sub>SO<sub>3</sub>M, -(CH<sub>2</sub>)<sub>q</sub>-(CHSO<sub>2</sub>M)CH<sub>2</sub>SO<sub>3</sub>M, more preferably hydrogen or -(CH<sub>2</sub>)<sub>q</sub>SO<sub>3</sub>M.

20

M is hydrogen or a water-soluble cation in sufficient amount to satisfy charge balance. For example, a sodium cation equally satisfies -(CH<sub>2</sub>)<sub>p</sub>CO<sub>2</sub>M, and -(CH<sub>2</sub>)<sub>q</sub>SO<sub>3</sub>M, thereby resulting in -(CH<sub>2</sub>)<sub>p</sub>CO<sub>2</sub>Na, and -(CH<sub>2</sub>)<sub>q</sub>SO<sub>3</sub>Na moieties. More than one monovalent cation, (sodium, potassium, etc.) can be combined to satisfy the required chemical charge balance. However, more than one anionic group may be charge-balanced by a divalent cation, or more than one mono-valent cation may be necessary to satisfy the charge requirements of a poly-anionic

25

30

radical. For example, a  $-(CH_2)_pPO_3M$  moiety substituted with sodium atoms has the formula  $-(CH_2)_pPO_3Na_3$ . Divalent cations such as calcium ( $Ca^{2+}$ ) or magnesium ( $Mg^{2+}$ ) may be substituted for or combined with other suitable mono-valent water-soluble cations. Preferred cations are sodium and potassium, more preferred is sodium.

X is a water-soluble anion such as chlorine ( $Cl^-$ ), bromine ( $Br^-$ ) and iodine ( $I^-$ ) or X can be any negatively-charged radical such as sulfate ( $SO_4^{2-}$ ) and methosulfate ( $CH_3SO_3^-$ ).

The formula indices have the following values: p has the value from 1 to 6, q has the value from 0 to 6; r has the value 0 or 1; w has the value 0 or 1, x has the value from 1 to 100; y has the value from 0 to 100; z has the value 0 or 1; m has the value from 2 to 700, preferably from 4 to 400, n has the value from 0 to 350, preferably from 0 to 200; m + n has the value of at least 5.

Preferably, x has a value lying in the range of from 1 to 20, preferably from 1 to 10.

The preferred amino-functional polymers of the present invention comprise polyamine backbones wherein less than 50% of the R groups comprise "oxy" R units, preferably less than 20%, more preferably less than 5%, most preferably the R units comprise no "oxy" R units.

The most preferred amino-functional polymers which comprise no "oxy" R units comprise polyamine backbones wherein less than 50% of the R groups comprise more than 3 carbon atoms. For example, ethylene, 1,2-propylene, and 1,3-propylene comprise 3 or less carbon atoms and are the preferred "hydrocarbyl" R units. That is when backbone R units are  $C_2$ - $C_{12}$  alkylene, preferred is  $C_2$ - $C_3$  alkylene, most preferred is ethylene.

The amino-functional polymers of the present invention comprise modified homogeneous and non-homogeneous polyamine backbones, wherein 100% or less of the  $-NH$  units are modified. For the purpose of the present invention the term "homogeneous polyamine backbone" is defined as a polyamine backbone having R units that are the same (i.e., all ethylene).


- However, this sameness definition does not exclude polyamines that comprise other extraneous units comprising the polymer backbone which are present due to an artifact of the chosen method of chemical synthesis. For example, it is known to those skilled in the art that ethanolamine may be used as an "initiator" in the synthesis of polyethyleneimines, therefore a sample of polyethyleneimine that comprises one hydroxyethyl moiety resulting from the polymerization "initiator" would be considered to comprise a homogeneous polyamine backbone for the purposes of the present invention. A polyamine backbone comprising all ethylene R units wherein no branching Y units are present is a homogeneous backbone. A polyamine backbone comprising all ethylene R units is a homogeneous backbone regardless of the degree of branching or the number of cyclic branches present.
- For the purposes of the present invention the term "non-homogeneous polymer backbone" refers to polyamine backbones that are a composite of various R unit lengths and R unit types. For example, a non-homogeneous backbone comprises R units that are a mixture of ethylene and 1,2-propylene units. For the purposes of the present invention a mixture of "hydrocarbyl" and "oxy" R units is not necessary to provide a non-homogeneous backbone.

- Preferred amino-functional polymers of the present invention comprise homogeneous polyamine backbones that are totally or partially substituted by polyethyleneoxy moieties, totally or partially quaternized amines, nitrogens totally or partially oxidized to N-oxides, and mixtures thereof. However, not all backbone amine nitrogens must be modified in the same manner, the choice of modification being left to the specific needs of the formulator. The degree of ethoxylation is also determined by the specific requirements of the formulator.

- The preferred polyamines that comprise the backbone of the compounds of the present invention are generally polyalkyleneimines (PAI's), preferably polyethyleneimines (PEI's), or PEI's connected by moieties having longer R units than the parent PAI's or PEI's.

Preferred amine polymer backbones comprise R units that are C<sub>2</sub> alkylene (ethylene) units, also known as polyethylenimines (PEI's). Preferred PEI's have at least moderate branching, that is the ratio of m to n is less than 4:1, however PEI's having a ratio of m to n of 2:1 are most preferred.

5 Preferred backbones, prior to modification have the general formula:



wherein R', m and n are the same as defined hereinabove. Preferred PEI's will have a molecular weight greater than 200 daltons.

15 The relative proportions of primary, secondary and tertiary amine units in the polyamine backbone, especially in the case of PEI's, will vary, depending on the manner of preparation. Each hydrogen atom attached to each nitrogen atom of the polyamine backbone chain represents a potential

20 site for subsequent substitution, quaternization or oxidation.

These polyamines can be prepared, for example, by polymerizing ethyleneimine in the presence of a catalyst such as carbon dioxide, sodium bisulfite, sulfuric acid, hydrogen peroxide, hydrochloric acid, acetic acid,


25 etc. Specific methods for preparing these polyamine backbones are disclosed in U.S. Patent 2,182,306, Ulrich et al., issued December 5, 1939; U.S. Patent 3,033,746, Mayle et al., issued May 8, 1962; U.S. Patent 2,208,095, Esselmann et al., issued July 16, 1940; U.S. Patent 2,806,839, Crowther, issued September 17, 1957; and U.S. Patent

30 2,553,696, Wilson, issued May 21, 1951; all herein incorporated by reference.

Examples of amino-functional polymers comprising PEI's, are illustrated in Formulas I - IV:

35 Formula I depicts an amino-functional polymer comprising a PEI backbone wherein all substitutable nitrogens are modified by replacement of hydrogen with a polyoxyalkyleneoxy unit,  $-(CH_2CH_2O)_7H$ , having the formula



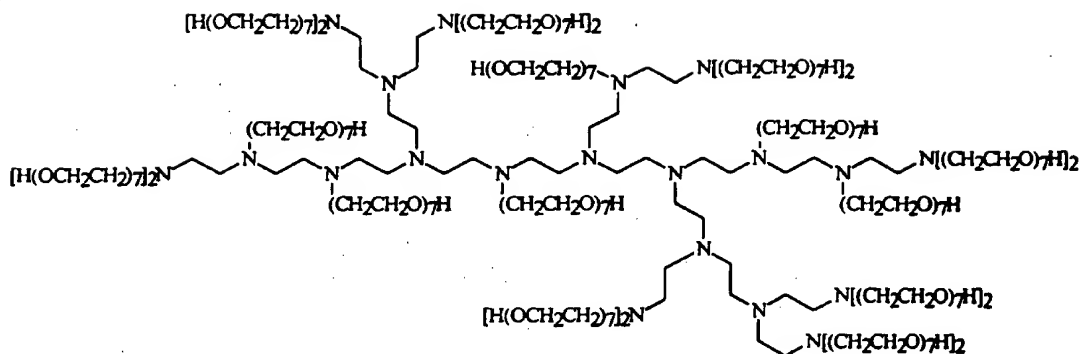


5

Formula I

This is an example of an amino-functional polymer that is fully modified by one type of moiety.


- 10 Formula II depicts an amino-functional polymer comprising a PEI backbone wherein all substitutable primary amine nitrogens are modified by replacement of hydrogen with a polyoxyalkyleneoxy unit,  $-(\text{CH}_2\text{CH}_2\text{O})_7\text{H}$ , the molecule is then modified by subsequent oxidation of all oxidizable primary and secondary nitrogens to N-oxides, said polymer having the
- 15 formula

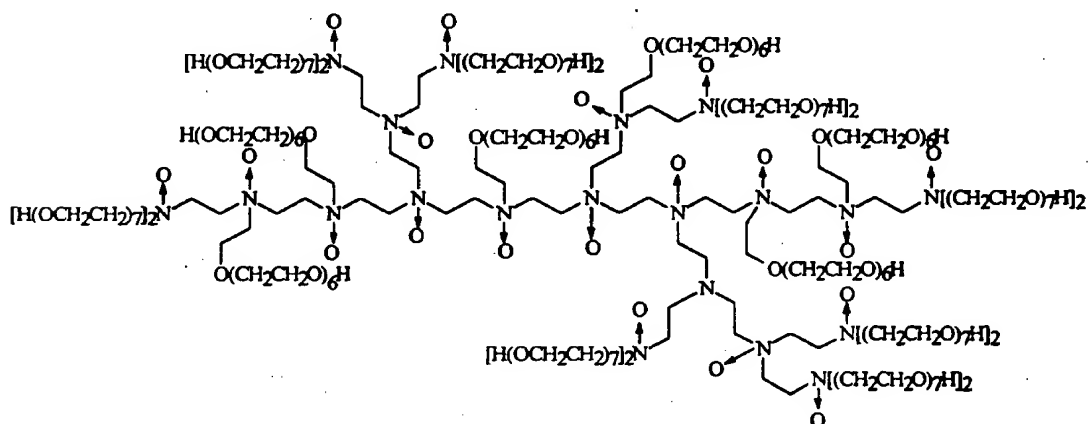

20

## Formula II


Formula III depicts an amino-functional polymer comprising a PEI backbone wherein all backbone hydrogen atoms are substituted and some backbone amine units are quaternized. The substituents are polyoxyalkyleneoxy units,  $-(\text{CH}_2\text{CH}_2\text{O})_7\text{H}$ , or methyl groups. The modified PEI has the formula

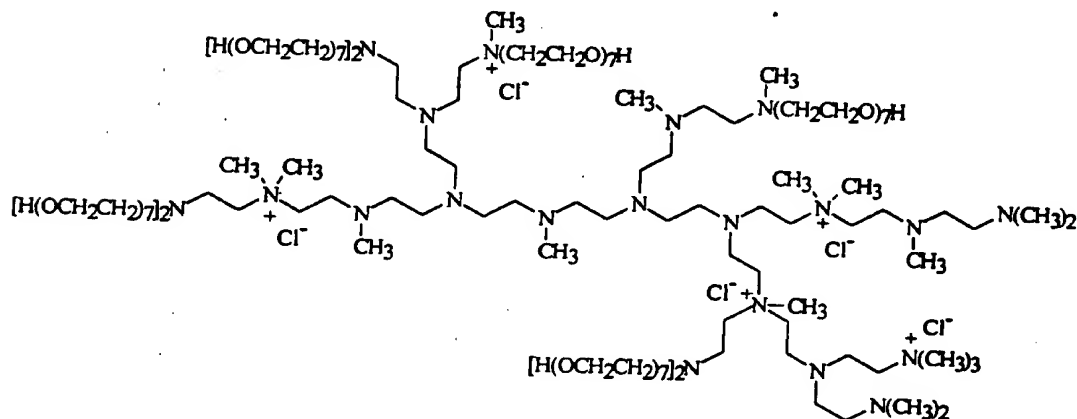

10

## Formula III

Formula IV depicts an amino-functional polymer comprising a PEI backbone wherein the backbone nitrogens are modified by substitution (i.e. by  $-(\text{CH}_2\text{CH}_2\text{O})_7\text{H}$  or methyl), quaternized, oxidized to N-oxides or combinations thereof. The resulting polymer has the formula

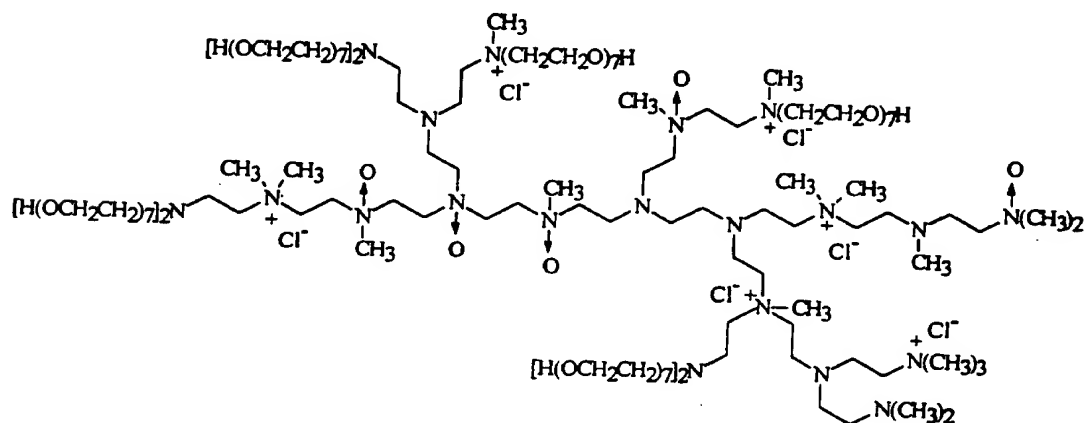

Formula IV
------------

5 In the above examples, not all nitrogens of a unit class comprise the same modification. The present invention allows the formulator to have a portion of the secondary amine nitrogens ethoxylated while having other secondary amine nitrogens oxidized to N-oxides. This also applies to the primary amine nitrogens, in that the formulator may choose to modify all or a portion of the primary amine nitrogens with one or more substituents prior to oxidation or quaternization. Any possible combination of R' groups can be substituted on the primary and secondary amine nitrogens, except for the restrictions described hereinabove.

15 Commercially available amino-functional polymer suitable for use herein are poly(ethyleneimine) with a MW1200, hydroxyethylated poly(ethyleneimine) from Polysciences, with a MW2000, and 80% hydroxyethylated poly(ethyleneimine) from Aldrich.

20 A typical amount of amino-functional polymer to be employed in the composition of the invention is preferably up to 90% by weight, preferably from 0.01% to 50% active by weight, more preferably from 0.1% to 20% by weight and most preferably from 0.5% to 5% by weight of the composition.

25 The composition may also contain optional components which may be suitable for further improving the aesthetic appearance of the fabrics treated therewith. Suitable optional components include a polyolefin dispersion, a fabric softener component, additional components and mixtures thereof.

30 For optimum performance of the compositions, the compositions of the invention comprise the dye fixing agent and the amino-functional polymer in a weight ratio of dye fixing agent to amino-functional polymer of from 100:1 to 0.01:1, preferably of from 10:1 to 0.1:1, more preferably of from 2:1 to 0.5:1.

35

Polyolefin dispersion

A polyolefin dispersion may optionally be used in the composition of the invention in order to provide anti-wrinkles and improved water absorbency benefits to the fabrics. Preferably, the polyolefin is a polyethylene, polypropylene or mixtures thereof. The polyolefin may be at least partially modified to contain various functional groups, such as carboxyl, carbonyl, ester, ether, alkylamide, sulfonic acid or amide groups. More preferably, the polyolefin employed in the present invention is at least partially carboxyl modified or, in other words, oxidized. In particular, oxidized or carboxyl modified polyethylene is preferred in the compositions of the present invention.

For ease of formulation, the polyolefin is preferably introduced as a suspension or an emulsion of polyolefin dispersed by use of an emulsifying agent. The polyolefin suspension or emulsion preferably has from 1% to 50%, more preferably from 10% to 35% by weight, and most preferably from 15% to 30% by weight of polyolefin in the emulsion. The polyolefin preferably has a molecular weight of from 1,000 to 15,000 and more preferably from 4,000 to 10,000.

When an emulsion is employed, the emulsifier may be any suitable emulsification or suspending agent. Preferably, the emulsifier is a cationic, nonionic, zwitterionic or anionic surfactant or mixtures thereof. Most preferably, any suitable cationic, nonionic or anionic surfactant may be employed as the emulsifier. Preferred emulsifiers are cationic surfactants such as the fatty amine surfactants and in particular the ethoxylated fatty amine surfactants. In particular, the cationic surfactants are preferred as emulsifiers in the present invention. The polyolefin is dispersed with the emulsifier or suspending agent in a ratio of emulsifier to polyolefin of from 1:10 to 3:1. Preferably, the emulsion includes from 0.1% to 50%, more preferably from 1% to 20% and most preferably from 2.5% to 10% by weight of emulsifier in the polyolefin emulsion. Polyethylene emulsions and suspensions suitable for use in the present invention are available under the tradename VELUSTROL from HOECHST Aktiengesellschaft of Frankfurt am Main, Germany. In particular, the polyethylene emulsions sold under the tradename VELUSTROL PKS, VELUSTROL KPA, or VELUSTROL P-40 may be employed in the compositions of the present invention.

The compositions of the present invention contain from 0.01% to 8% by weight of the dispersible polyolefin. More preferably, the compositions include from 0.1% to 5% by weight and most preferably from 0.1% to 3% by weight of the polyolefin. When the polyolefin is added to the compositions of the present invention as an emulsion or suspension, the emulsion or suspension is added at sufficient enough quantities to provide the above noted levels of dispersible polyolefin in the compositions.

#### Fabric softener component

10

A fabric softener component may also suitably be used in the composition of the invention so as to provide softness and antistatic properties to the treated fabrics. When used, the fabric softener component will typically be present at a level sufficient to provide softening and antistatic properties.

15

Typical levels are those conventionally used in fabric softening compositions, i.e from 1% to 99% by weight of the composition. Depending on the composition execution, i.e liquid or solid, the composition will preferably comprise a level of fabric softening components for liquid compositions of from 1% to 5% by weight for the diluted compositions or from 5% to 80%, more preferably 10% to 50%, most preferably 15% to 35% by weight for concentrated compositions. Where nonionic fabric softener components are present, the level of nonionic softener component in the composition will typically be from 0.1% to 10%, preferably from 1% to 5% by weight.

25

Where the composition comprising the softener component is applied on a substrate such as a dryer-sheet, the preferred level of fabric softener component will preferably be from 20% to 99%, more preferably from 30% to 90% by weight, and even more preferably from 35% to 85% by weight.

30

Said fabric softening component may be selected from cationic, nonionic, amphoteric or anionic fabric softening component.

35


The preferred, typical cationic fabric softening components include the water-insoluble quaternary-ammonium fabric softening actives, the most commonly used having been di-long alkyl chain ammonium chloride or methyl sulfate.

Preferred cationic softeners among these include the following:


- 1) ditallow dimethylammonium chloride (DTDMAC);
- 2) dihydrogenated tallow dimethylammonium chloride;
- 3) dihydrogenated tallow dimethylammonium methylsulfate;
- 4) distearyl dimethylammonium chloride;
- 5) dioleyl dimethylammonium chloride;
- 6) dipalmityl hydroxyethyl methylammonium chloride;
- 7) stearyl benzyl dimethylammonium chloride;
- 8) tallow trimethylammonium chloride;
- 9) hydrogenated tallow trimethylammonium chloride;
- 10) C<sub>12-14</sub> alkyl hydroxyethyl dimethylammonium chloride;
- 11) C<sub>12-18</sub> alkyl dihydroxyethyl methylammonium chloride;
- 12) di(stearoyloxyethyl) dimethylammonium chloride (DSOEDMAC);
- 13) di(tallowoyloxyethyl) dimethylammonium chloride;
- 14) ditallow imidazolinium methylsulfate;
- 15) 1-(2-tallowylamidoethyl)-2-tallowyl imidazolinium methylsulfate.

However, in recent years, the need has arisen for more environmental-friendly materials, and rapidly biodegradable quaternary ammonium compounds have been presented as alternatives to the traditionally used di-long alkyl chain ammonium chlorides and methyl sulfates. Said materials and fabric softening compositions containing them are disclosed in numerous publications such as EP-A-0,040,562, and EP-A-0,239,910.

The quaternary ammonium compounds and amine precursors herein have the formula (I) or (II), below :

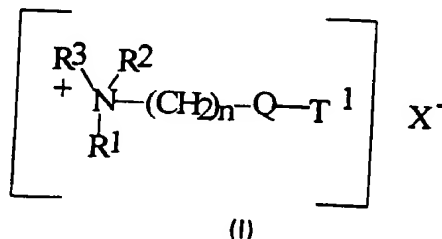

or

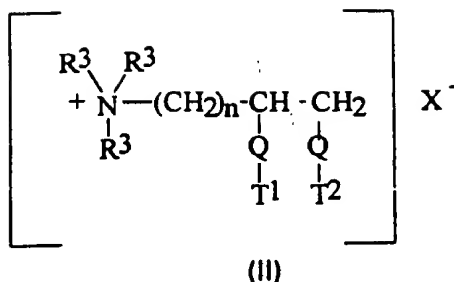

- wherein Q is selected from -O-C(O)-, -C(O)-O-, -O-C(O)-O-, -NR<sup>4</sup>-C(O)-, -C(O)-NR<sup>4</sup>-;
- 5 R<sup>1</sup> is (CH<sub>2</sub>)<sub>n</sub>-Q-T<sup>2</sup> or T<sup>3</sup>;
- R<sup>2</sup> is (CH<sub>2</sub>)<sub>m</sub>-Q-T<sup>4</sup> or T<sup>5</sup> or R<sup>3</sup>;
- R<sup>3</sup> is C<sub>1</sub>-C<sub>4</sub> alkyl or C<sub>1</sub>-C<sub>4</sub> hydroxyalkyl or H;
- R<sup>4</sup> is H or C<sub>1</sub>-C<sub>4</sub> alkyl or C<sub>1</sub>-C<sub>4</sub> hydroxyalkyl;
- 10 T<sup>1</sup>, T<sup>2</sup>, T<sup>3</sup>, T<sup>4</sup>, T<sup>5</sup> are independently C<sub>11</sub>-C<sub>22</sub> alkyl or alkenyl;
- n and m are integers from 1 to 4; and
- X<sup>-</sup> is a softener-compatible anion.

- 15 Non-limiting examples of softener-compatible anions include chloride or methyl sulfate.

- The alkyl, or alkenyl, chain T<sup>1</sup>, T<sup>2</sup>, T<sup>3</sup>, T<sup>4</sup>, T<sup>5</sup> must contain at least 11 carbon atoms, preferably at least 16 carbon atoms. The chain may be straight or branched.

20

- Tallow is a convenient and inexpensive source of long chain alkyl and alkenyl material. The compounds wherein T<sup>1</sup>, T<sup>2</sup>, T<sup>3</sup>, T<sup>4</sup>, T<sup>5</sup> represent the mixture of long chain materials typical for tallow are particularly preferred. Specific examples of quaternary ammonium compounds suitable for use in
- 25 the aqueous fabric softening compositions herein include :

- 1) N,N-di(tallowyl-oxy-ethyl)-N,N-dimethyl ammonium chloride;
- 2) N,N-di(tallowyl-oxy-ethyl)-N-methyl, N-(2-hydroxyethyl) ammonium methyl sulfate;
- 30 3) N,N-di(2-tallowyl-oxy-2-oxo-ethyl)-N,N-dimethyl ammonium chloride;
- 4) N,N-di(2-tallowyl-oxy-ethylcarbonyl-oxy-ethyl)-N,N-dimethyl ammonium chloride;

- 5) N-(2-tallowyl-oxy-2-ethyl)-N-(2-tallowyl-oxy-2-oxo-ethyl)-N,N-dimethyl ammonium chloride;  
6) N,N,N-tri(tallowyl-oxy-ethyl)-N-methyl ammonium chloride;  
7) N-(2-tallowyl-oxy-2-oxo-ethyl)-N-(tallowyl-N,N-dimethyl-ammonium chloride; and  
8) 1,2-ditallowyl-oxy-3-trimethylammoniopropane chloride;  
and mixtures of any of the above materials.

Of these, compounds 1-7 are examples of compounds of Formula (I);  
compound 8 is a compound of Formula (II).

Particularly preferred is N,N-di(tallowyl-oxy-ethyl)-N,N-dimethyl ammonium chloride, where the tallow chains are at least partially unsaturated.

- The level of unsaturation of the tallow chain can be measured by the Iodine Value (IV) of the corresponding fatty acid, which in the present case should preferably be in the range of from 5 to 100 with two categories of compounds being distinguished, having a IV below or above 25.
- Indeed, for compounds of Formula (I) made from tallow fatty acids having a IV of from 5 to 25, preferably 15 to 20, it has been found that a cis/trans isomer weight ratio greater than 30/70, preferably greater than 50/50 and more preferably greater than 70/30 provides optimal concentrability.
- For compounds of Formula (I) made from tallow fatty acids having a IV of above 25, the ratio of cis to trans isomers has been found to be less critical unless very high concentrations are needed.

Other examples of suitable quaternary ammoniums of Formula (I) and (II) are obtained by, e.g. :

- replacing "tallow" in the above compounds with, for example, coco, palm, lauryl, oleyl, ricinoleyl, stearyl, palmityl, or the like, said fatty acyl chains being either fully saturated, or preferably at least partly unsaturated;
- replacing "methyl" in the above compounds with ethyl, ethoxy, propyl, propoxy, isopropyl, butyl, isobutyl or t-butyl;



replacing "chloride" in the above compounds with bromide, methylsulfate, formate, sulfate, nitrate, and the like.

5 In fact, the anion is merely present as a counterion of the positively charged quaternary ammonium compounds. The nature of the counterion is not critical at all to the practice of the present invention. The scope of this invention is not considered limited to any particular anion.

10 By "amine precursors thereof" is meant the secondary or tertiary amines corresponding to the above quaternary ammonium compounds, said amines being substantially protonated in the present compositions due to the pH values.

15 Additional fabric softening materials may be used in addition or alternatively to the cationic fabric softener. These may be selected from nonionic, amphoteric or anionic fabric softening material. Disclosure of such materials may be found in US 4,327,133; US 4,421,792; US 4,426,299; US 4,460,485; US 3,644,203; US 4,661,269; U.S. 4,439,335; U.S. 3,861,870; US 4,308,151; US 3,886,075; US 4,233,164; US 4,401,578; 20 US 3,974,076; US 4,237,016 and EP 472,178.

Typically, such nonionic fabric softener materials have an HLB of from 2 to 9, more typically from 3 to 7. Such nonionic fabric softener materials tend to be readily dispersed either by themselves, or when combined with other 25 materials such as single-long-chain alkyl cationic surfactant described in detail hereinafter. Dispersibility can be improved by using more single-long-chain alkyl cationic surfactant, mixture with other materials as set forth hereinafter, use of hotter water, and/or more agitation. In general, the materials selected should be relatively crystalline, higher melting, (e.g. 30  $>40^{\circ}\text{C}$ ) and relatively water-insoluble.

Preferred nonionic softeners are fatty acid partial esters of polyhydric alcohols, or anhydrides thereof, wherein the alcohol, or anhydride, contains from 2 to 18, preferably from 2 to 8, carbon atoms, and each fatty acid 35 moiety contains from 12 to 30, preferably from 16 to 20, carbon atoms. Typically, such softeners contain from one to 3, preferably 2 fatty acid groups per molecule.

The polyhydric alcohol portion of the ester can be ethylene glycol, glycerol, poly (e.g., di-, tri-, tetra, penta-, and/or hexa-) glycerol, xylitol, sucrose, erythritol, pentaerythritol, sorbitol or sorbitan. Sorbitan esters and polyglycerol monostearate are particularly preferred.

The fatty acid portion of the ester is normally derived from fatty acids having from 12 to 30, preferably from 16 to 20, carbon atoms, typical examples of said fatty acids being lauric acid, myristic acid, palmitic acid, stearic acid and behenic acid.

Highly preferred optional nonionic softening agents for use in the present invention are the sorbitan esters, which are esterified dehydration products of sorbitol, and the glycerol esters.

Commercial sorbitan monostearate is a suitable material. Mixtures of sorbitan stearate and sorbitan palmitate having stearate/palmitate weight ratios varying between 10:1 and 1:10, and 1,5-sorbitan esters are also useful.

Glycerol and polyglycerol esters, especially glycerol, diglycerol, triglycerol, and polyglycerol mono- and/or di-esters, preferably mono-, are preferred herein (e.g. polyglycerol monostearate with a trade name of Radiesurf 7248).

Useful glycerol and polyglycerol esters include mono-esters with stearic, oleic, palmitic, lauric, isostearic, myristic, and/or behenic acids and the diesters of stearic, oleic, palmitic, lauric, isostearic, behenic, and/or myristic acids. It is understood that the typical mono-ester contains some di- and tri-ester, etc.

The "glycerol esters" also include the polyglycerol, e.g., diglycerol through octaglycerol esters. The polyglycerol polyols are formed by condensing glycerin or epichlorohydrin together to link the glycerol moieties via ether linkages. The mono- and/or diesters of the polyglycerol polyols are preferred, the fatty acyl groups typically being those described hereinbefore for the sorbitan and glycerol esters.

Further fabric softening components suitable for use herein are the softening clays, such as the low ion-exchange-capacity ones described in EP-A-0,150,531.

5

For the preceding fabric softening agents, especially with biodegradable fabric softening agents, the pH of the liquid compositions herein is an essential parameter of the present invention. Indeed, it influences the stability of the quaternary ammonium or amine precursors compounds, especially in prolonged storage conditions. The pH, as defined in the present context, is measured in the neat compositions at 20°C. For optimum hydrolytic stability of these compositions, the neat pH, measured in the above-mentioned conditions, must be in the range of from 2.0 to 4.5. Preferably, where the liquid fabric softening compositions of the invention are in a concentrated form, the pH of the neat composition is in the range of 2.0 to 3.5, while if it is in a diluted form, the pH of the neat composition is in the range of 2.0 to 3.0. The pH of these compositions herein can be regulated by the addition of a Bronsted acid.

20 Examples of suitable acids include the inorganic mineral acids, carboxylic acids, in particular the low molecular weight (C<sub>1</sub>-C<sub>5</sub>) carboxylic acids, and alkylsulfonic acids. Suitable inorganic acids include HCl, H<sub>2</sub>SO<sub>4</sub>, HNO<sub>3</sub> and H<sub>3</sub>PO<sub>4</sub>. Suitable organic acids include formic, acetic, citric, methylsulfonic and ethylsulfonic acid. Preferred acids are citric, hydrochloric, phosphoric, 25 formic, methylsulfonic acid, and benzoic acids.

#### Additional components


The composition may also optionally contain additional components such as 30 surfactant concentration aids, electrolyte concentration aids, stabilisers, such as well-known antioxidants and reductive agents, soil release polymers, emulsifiers, bacteriocides, colorants, perfumes, preservatives, optical brighteners, anti-ionisation agents, antifoam agents and enzymes. These ingredients, especially the minor ingredients, and especially perfume, 35 can be usefully added with, and preferably protected by, "carrier materials" such as zeolites, starch, cyclodextrin, wax, etc.

#### Surfactant concentration aids

Surfactant concentration aids may also optionally be used. When used, said surfactant concentration aid will help achieving the desired finished product viscosity as well as stabilising the finished product upon storage. Surfactant concentration aids are typically selected from single long chain alkyl cationic surfactants, nonionic alkoxylated surfactants, amine oxides, fatty acids, and mixtures thereof, typically used at a level of from 0 to 15% by weight of the composition.

10 Single long chain alkyl cationic surfactants


Such mono-long-chain-alkyl cationic surfactants useful in the present invention are, preferably, quaternary ammonium salts of the general formula :



wherein the  $R^2$  group is  $C_{10}$ - $C_{22}$  hydrocarbon group, preferably  $C_{12}$ - $C_{18}$  alkyl group of the corresponding ester linkage interrupted group with a short alkylene ( $C_1$ - $C_4$ ) group between the ester linkage and the N, and having a similar hydrocarbon group, e.g., a fatty acid ester of choline, preferably  $C_{12}$ - $C_{14}$  (coco) choline ester and/or  $C_{16}$ - $C_{18}$  tallow choline ester at from 0.1% to 20% by weight of the softener active. Each R is a  $C_1$ - $C_4$  alkyl or substituted (e.g., hydroxy) alkyl, or hydrogen, preferably methyl, and the counterion  $X^-$  is a softener compatible anion, for example, chloride, bromide, methyl sulfate, etc.


Other cationic materials with ring structures such as alkyl imidazoline, imidazolinium, pyridine, and pyridinium salts having a single  $C_{12}$ - $C_{30}$  alkyl chain can also be used. Very low pH is required to stabilize, e.g., imidazoline ring structures.

Some alkyl imidazolinium salts and their imidazoline precursors useful in the present invention have the general formula :



- wherein Y<sup>2</sup> is -C(O)-O-, -O-(O)C-, -C(O)-N(R<sup>5</sup>)-, or -N(R<sup>5</sup>)-C(O)- in which R<sup>5</sup> is hydrogen or a C<sub>1</sub>-C<sub>4</sub> alkyl radical; R<sup>6</sup> is a C<sub>1</sub>-C<sub>4</sub> alkyl radical or H (for imidazoline precursors); R<sup>7</sup> and R<sup>8</sup> are each independently selected from R and R<sup>2</sup> as defined hereinbefore for the single-long-chain cationic surfactant with only one being R<sup>2</sup>.

- Some alkyl pyridinium salts useful in the present invention have the general formula :



- wherein R<sup>2</sup> and X<sup>-</sup> are as defined above. A typical material of this type is cetyl pyridinium chloride.

#### Nonionic Alkoxylated Surfactant

- Suitable nonionic alkoxylated surfactants for use herein include addition products of ethylene oxide and, optionally, propylene oxide, with fatty alcohols, fatty acids and fatty amines.

- Suitable compounds are substantially water-soluble surfactants of the general formula :



- wherein R<sup>2</sup> is selected from primary, secondary and branched chain alkyl and/or acyl hydrocarbyl groups; primary, secondary and branched chain alkenyl hydrocarbyl groups; and primary, secondary and branched chain alkyl- and alkenyl-substituted phenolic hydrocarbyl groups; said hydrocarbyl

groups having a hydrocarbyl chain length of up to 20, preferably from 10 to 18 carbon atoms.

Y is typically -O-, -C(O)O-, -C(O)N(R)-, or -C(O)N(R)R-, in which R<sup>2</sup> and R, when present, have the meanings given hereinbefore, and/or R can be hydrogen, and z is of from 5 to 50, preferably of from 1- to 30.

The nonionic surfactants herein are characterized by an HLB (hydrophilic-lipophilic balance) of from 7 to 20, preferably from 8 to 15.

Examples of particularly suitable nonionic surfactants include

- Straight-Chain, Primary Alcohol Alkoxylates such as tallow alcohol-EO(11), tallow alcohol-EO(18), and tallow alcohol-EO(25);
- Straight-Chain, Secondary Alcohol Alkoxylates such as 2-C<sub>16</sub>EO(11); 2-C<sub>20</sub>EO(11); and 2-C<sub>16</sub>EO(14);
- Alkyl Phenol Alkoxylates, such as p-tridecylphenol EO(11) and p-pentadecylphenol EO(18), as well as
- Olefinic Alkoxylates, and Branched Chain Alkoxylates such as branched chain primary and secondary alcohols which are available from the well-known "OXO" process.

#### Amine Oxides

Suitable amine oxides include those with one alkyl or hydroxyalkyl moiety of 8 to 28 carbon atoms, preferably from 8 to 16 carbon atoms, and two alkyl moieties selected from alkyl groups and hydroxyalkyl groups with 1 to 3 carbon atoms.

Examples include dimethyloctylamine oxide, diethyldecylamine oxide, bis-(2-hydroxyethyl)dodecylamine oxide, dimethyldodecylamine oxide, dipropyltetradecylamine oxide, methylethylhexadecylamine oxide, dimethyl-2-hydroxyoctadecylamine oxide, and coconut fatty alkyl dimethylamine oxide.

### Fatty Acids

Suitable fatty acids include those containing from 12 to 25, preferably from  
5 16 to 20 total carbon atoms, with the fatty moiety containing from 10 to  
22, preferably from 15 to 17 (mid cut), carbon atoms.

A preferred surfactant concentration aid for use herein is a nonionic  
alkoxylated surfactant. When used, such nonionic alkoxylated surfactant  
10 will be present in an amount of 0.01% to 10% by weight, preferably from  
0.05% to 2% by weight of the composition. Most preferably, for optimum  
stabilisation of the composition, the composition of the invention has a  
weight ratio of amino-functional polymer to nonionic alkoxylated surfactant  
of from 500:1 to 0.5:1, preferably of from 30:1 to 1:1.

15

### Electrolyte Concentration Aids

Inorganic viscosity control agents which can also act like or augment the  
effect of the surfactant concentration aids, include water-soluble, ionizable  
20 salts which can also optionally be incorporated into the compositions of the  
present invention. Incorporation of these components to the composition  
must be processed at a very slow rate.

A wide variety of ionizable salts can be used. Examples of suitable salts are  
25 the halides of the Group IA and IIA metals of the Periodic Table of the  
Elements, e.g., calcium chloride, magnesium chloride, sodium chloride,  
potassium bromide, and lithium chloride. The ionizable salts are particularly  
useful during the process of mixing the ingredients to make the  
compositions herein, and later to obtain the desired viscosity. The amount  
30 of ionizable salts used depends on the amount of active ingredients used in  
the compositions and can be adjusted according to the desires of the  
formulator. Typical levels of salts used to control the composition viscosity  
are from 20 to 20,000 parts per million (ppm), preferably from 20 to  
11,000 ppm, by weight of the composition.

35

Alkylene polyammonium salts can be incorporated into the composition to  
give viscosity control in addition to or in place of the water-soluble, ionizable

salts above. In addition, these agents can act as scavengers, forming ion pairs with anionic detergent carried over from the main wash, in the rinse, and on the fabrics, and may improve softness performance. These agents may stabilise the viscosity over a broader range of temperature, especially at low temperatures, compared to the inorganic electrolytes.

Specific examples of alkylene polyammonium salts include L-lysine monohydrochloride and 1,5-diammonium 2-methyl pentane dihydrochloride.

Another optional ingredient is a liquid carrier. Suitable liquid carriers are selected from water, organic solvents and mixtures thereof. The liquid carrier employed in the instant compositions is preferably at least primarily water due to its low cost relative availability, safety, and environmental compatibility. The level of water in the liquid carrier is preferably at least 50%, most preferably at least 60%, by weight of the carrier. Mixtures of water and low molecular weight, e.g., <200, organic solvent, e.g., lower alcohol such as ethanol, propanol, isopropanol or butanol are useful as the carrier liquid. Low molecular weight alcohols include monohydric, dihydric (glycol, etc.) trihydric (glycerol, etc.), and higher polyhydric (polyols) alcohols.

#### Method

In another aspect of the invention, there is provided a method for providing color care to fabrics upon domestic laundering treatment which comprises the step of contacting the fabrics with an aqueous medium comprising a composition as defined hereinbefore. Preferably, said aqueous medium is at a temperature between 2°C to 40°C, more preferably between 5°C to 25°C.

In a further aspect of the invention, the composition of the invention may be applied on a substrate, such as a dryer-sheet. Accordingly, there is also provided a method for providing color care on treated fabrics upon domestic treatment which comprises the step of contacting the fabrics with a composition as defined hereinbefore, wherein said composition is applied on



a substrate, preferably a dryer-sheet. Preferably, where the composition of the invention is applied on a dryer-sheet, the compositions are used in tumble-drying processes.

- 5 By "color care" is meant that fabrics which have been in contact with an aqueous solution of a composition comprising a combination of a dye fixing agent and an amino-functional polymer, as defined hereinbefore, and after, and/or prior and/or simultaneously washed with a detergent composition exhibit a better fabric color appearance compared to fabrics which have not  
10 been contacted with said composition.

#### Applications

- The compositions of the invention are suitable for use in different  
15 applications such as a pre-treatment composition prior to the laundering of the fabrics, as a wash additive, as a composition suitable for use in the rinse-cycle of the laundry cycle or applied on a dryer-sheet. The compositions of the invention may also be in a spray, foam, or aerosol form which for example can be suitable for use while ironing, or applied on the  
20 surfaces of the tumble dryer.

The color care benefit may either be assessed visually or by determination of the so-called delta-E values.

- 25 When the visual assessment is used, a panel of expert graders visually compare, according to the established panel score unit (PSU) scales, fabrics treated with and without the composition according to the present invention. A positive PSU value indicates a better performance (PSU scale: 0 = no difference, 1 = I think there is a difference, 2 = I know there is a  
30 difference, 3 = I know there is a lot of difference, 4 = I know there is a whole lot of difference).

- Another method for the assessment of the color care benefit to fabrics is the determination of the so-called delta-E values. Delta E's are defined, for  
35 instance, in ASTM D2244. Delta E is the computed color difference as defined in ASTM D2244, i.e the magnitude and direction of the difference between two psychophysical color stimuli defined by tristimulus values, or

by chromaticity coordinates and luminance factor, as computed by means of a specified set of color-difference equations defined in the CIE 1976 CIELAB opponent-color space, the Hunter opponent-color space, the Friele-Mac Adam-Chickering color space or any equivalent color space.

5

The invention is illustrated in the following non-limiting examples, in which all percentages are on an active weight basis unless otherwise stated.

10 In the examples, the abbreviated component identifications have the following meanings:

DEQA	:	Di-(tallowyl-oxy-ethyl) dimethyl ammonium chloride
DOEQA	:	Di-(oleyloxyethyl) dimethyl ammonium methylsulfate
DTDMAC	:	Ditallow dimethylammonium chloride
DHEQA	:	Di-(soft-tallowyl-oxy-ethyl) hydroxyethyl methyl ammonium methylsulfate
Fatty acid	:	Stearic acid of IV = 0
Electrolyte	:	Calcium chloride
DTDMAMS	:	Ditallow dimethyl ammonium methylsulfate
SDASA	:	1:2 Ratio of stearyl dimethyl amine:triple-pressed stearic acid
Glycosperse S-20	:	Polyethoxylated sorbitan monostearate available from Lonza
Clay	:	Calcium Bentonite Clay, Bentonite L, sold by Southern Clay Products
Neodol 45-13	:	C <sub>14</sub> -C <sub>15</sub> linear primary alcohol ethoxylate, sold by Shell Chemical Co
TAE25	:	Tallow alcohol ethoxylated with 25 moles of ethylene oxide per mole of alcohol
PEG	:	Polyethylene Glycol 4000
PEI	:	Solution of polyethylene imine (MW 2000, at 50% active) available under the tradename Lupasol G35 from BASF
PEI 1800 E1	:	Ethoxylated polyethylene imine (MW 1800, at 50% active) as synthesised in Synthesis example 1

- PEI 1200 E1 : Ethoxylated polyethylene imine (MW 1200, at 50% active in water) as synthesised in Synthesis example 5
- Dye Fix 1 : Cationic dye fixing agent (50% active) available under the tradename Tinofix Eco from Ciba-Geigy
- Dye Fix 2 : Emulsified cationic dye fixative (30% active) available under the tradename Rewin SRF-O from CHT-Beitlich

### Synthesis Example 1 -Preparation of PEI 1800 E<sub>1</sub>

#### *Step A)*

5

The ethoxylation is conducted in a 2 gallon stirred stainless steel autoclave equipped for temperature measurement and control, pressure measurement, vacuum and inert gas purging, sampling, and for introduction of ethylene oxide as a liquid. A ~20 lb. net cylinder of ethylene oxide (ARC) is set up to deliver ethylene oxide as a liquid by a pump to the autoclave with the cylinder placed on a scale so that the weight change of the cylinder could be monitored.

10

A 750 g portion of polyethyleneimine (PEI) (Nippon Shokubai, Epomin SP-018 having a listed average molecular weight of 1800 equating to 0.417 moles of polymer and 17.4 moles of nitrogen functions) is added to the autoclave. The autoclave is then sealed and purged of air (by applying vacuum to minus 28" Hg followed by pressurization with nitrogen to 250 psia, then venting to atmospheric pressure). The autoclave contents are heated to 130 °C while applying vacuum. After about one hour, the autoclave is charged with nitrogen to about 250 psia while cooling the autoclave to about 105 °C. Ethylene oxide is then added to the autoclave incrementally over time while closely monitoring the autoclave pressure, temperature, and ethylene oxide flow rate. The ethylene oxide pump is turned off and cooling is applied to limit any temperature increase resulting from any reaction exotherm. The temperature is maintained between 100°C and 110°C while the total pressure is allowed to gradually increase during the course of the reaction. After a total of 750 grams of ethylene oxide has been charged to the autoclave (roughly equivalent to one mole ethylene oxide per PEI nitrogen function), the temperature is increased to

20

25

30

110°C and the autoclave is allowed to stir for an additional hour. At this point, vacuum is applied to remove any residual unreacted ethylene oxide.

*Step B)*

5

The reaction mixture is then deodorized by passing about 100 cu. ft. of inert gas (argon or nitrogen) through a gas dispersion frit and through the reaction mixture while agitating and heating the mixture to 130°C.

- 10 The final reaction product is cooled slightly and collected in glass containers purged with nitrogen.

In other preparations the neutralization and deodorization is accomplished in the reactor before discharging the product.

15

If a PEI 1800 E7 is desired, the following step of catalyst addition will be included between Step A and B.

- 20 Vacuum is continuously applied while the autoclave is cooled to about 50°C while introducing 376g of a 25% sodium methoxide in methanol solution (1.74 moles, to achieve a 10% catalyst loading based upon PEI nitrogen functions). The methoxide solution is sucked into the autoclave under vacuum and then the autoclave temperature controller setpoint is increased to 130°C. A device is used to monitor the power consumed by the
- 25 agitator. The agitator power is monitored along with the temperature and pressure. Agitator power and temperature values gradually increase as methanol is removed from the autoclave and the viscosity of the mixture increases and stabilizes in about 1 hour indicating that most of the methanol has been removed. The mixture is further heated and agitated
- 30 under vacuum for an additional 30 minutes.

- Vacuum is removed and the autoclave is cooled to 105°C while it is being charged with nitrogen to 250 psia and then vented to ambient pressure. The autoclave is charged to 200 psia with nitrogen. Ethylene oxide is again
- 35 added to the autoclave incrementally as before while closely monitoring the autoclave pressure, temperature, and ethylene oxide flow rate while maintaining the temperature between 100°C and 110°C and limiting any

temperature increases due to reaction exotherm. After the addition of 4,500g of ethylene oxide (resulting in a total of 7 moles of ethylene oxide per mole of PEI nitrogen function) is achieved over several hours, the temperature is increased to 110°C and the mixture stirred for an additional  
5 hour.

The reaction mixture is then collected in nitrogen purged containers and eventually transferred into a 22 L three neck round bottomed flask equipped with heating and agitation. The strong alkali catalyst is neutralized by  
10 adding 167 g methanesulfonic acid (1.74 moles).

#### Synthesis Example 2 -4.7% Quaternization of PEI 1800 E7

To a 500ml erlenmeyer flask equipped with a magnetic stirring bar is added  
15 poly(ethyleneimine), MW 1800 ethoxylated to a degree of 7 (224g, 0.637 mol nitrogen, prepared as in Synthesis Example 1) and acetonitrile (Baker, 150g, 3.65 mol). Dimethyl sulfate (Aldrich, 3.8g, 0.030 mol) is added all at once to the rapidly stirring solution, which is then stoppered and stirred at room temperature overnight. The acetonitrile is evaporated on the rotary  
20 evaporator at ~60°C, followed by a Kugelrohr apparatus (Aldrich) at ~80° C to afford ~220g of the desired material as a dark brown viscous liquid. A <sup>13</sup>C-NMR (D<sub>2</sub>O) spectrum shows the absence of a peak at ~58ppm corresponding to dimethyl sulfate. A <sup>1</sup>H-NMR (D<sub>2</sub>O) spectrum shows the partial shifting of the peak at 2.5ppm (methylenes attached to  
25 unquaternized nitrogens) to ~3.0ppm.

#### Synthesis Example 3 -Oxidation of 4.7% Quaternized PEI 1800 E7

To a 500ml erlenmeyer flask equipped with a magnetic stirring bar is added  
30 poly(ethyleneimine), MW 1800 which has been ethoxylated to a degree of 7, and ~4.7% quaternized with dimethyl sulfate (121.7g, ~0.32 mol oxidizeable nitrogen, prepared as in Synthesis Example 2), hydrogen peroxide (Aldrich, 40g of a 50 wt% solution in water, 0.588 mol), and water (109.4g). The flask is stoppered, and after an initial exotherm the  
35 solution is stirred at room temperature overnight. A <sup>1</sup>H-NMR (D<sub>2</sub>O) spectrum shows the total shifting of the methylene peaks at 2.5-3.0ppm to ~3.5ppm. To the solution is added ~5g of 0.5% Pd on alumina pellets,

and the solution is allowed to stand at room temperature for ~3 days. Peroxide indicator paper shows that no peroxide is left in the system. The material is stored as a 46.5% solution in water.

5 Synthesis Example 4 -Formation of amine oxide of PEI 1800 E7

To a 500 mL Erlenmeyer flask equipped with a magnetic stirring bar is added polyethyleneimine having a molecular weight of 1800 and ethoxylated to a degree of about 7 ethoxy groups per nitrogen (PEI-1800, E7) (209 g, 0.595 mol nitrogen, prepared as in Synthesis Example I), and hydrogen peroxide (120 g of a 30 wt % solution in water, 1.06 mol). The flask is stoppered, and after an initial exotherm the solution is stirred at room temperature overnight. <sup>1</sup>H-NMR (D<sub>2</sub>O) spectrum obtained on a sample of the reaction mixture indicates complete conversion. The resonances ascribed to methylene protons adjacent to unoxidized nitrogens have shifted from the original position at ~2.5 ppm to ~3.5 ppm. To the reaction solution is added approximately 5 g of 0.5% Pd on alumina pellets, and the solution is allowed to stand at room temperature for approximately 3 days. The solution is tested and found to be negative for peroxide by indicator paper. The material as obtained is suitably stored as a 51.1% active solution in water.

Synthesis Example 5 -Preparation of PEI 1200 E1

25 *Step A)*

The ethoxylation is conducted in a 2 gallon stirred stainless steel autoclave equipped for temperature measurement and control, pressure measurement, vacuum and inert gas purging, sampling, and for introduction of ethylene oxide as a liquid. A ~20 lb. net cylinder of ethylene oxide (ARC) is set up to deliver ethylene oxide as a liquid by a pump to the autoclave with the cylinder placed on a scale so that the weight change of the cylinder could be monitored.

35 A 750 g portion of polyethyleneimine (PEI) ( having a listed average molecular weight of 1200 equating to about 0.625 moles of polymer and 17.4 moles of nitrogen functions) is added to the autoclave. The autoclave

is then sealed and purged of air (by applying vacuum to minus 28" Hg followed by pressurization with nitrogen to 250 psia, then venting to atmospheric pressure). The autoclave contents are heated to 130°C while applying vacuum. After about one hour, the autoclave is charged with  
5 nitrogen to about 250 psia while cooling the autoclave to about 105°C. Ethylene oxide is then added to the autoclave incrementally over time while closely monitoring the autoclave pressure, temperature, and ethylene oxide flow rate. The ethylene oxide pump is turned off and cooling is applied to limit any temperature increase resulting from any reaction exotherm. The  
10 temperature is maintained between 100°C and 110°C while the total pressure is allowed to gradually increase during the course of the reaction. After a total of 750 grams of ethylene oxide has been charged to the autoclave (roughly equivalent to one mole ethylene oxide per PEI nitrogen function), the temperature is increased to 110°C and the autoclave is  
15 allowed to stir for an additional hour. At this point, vacuum is applied to remove any residual unreacted ethylene oxide.

*Step B)*

The reaction mixture is then deodorized by passing about 100 cu. ft. of  
20 inert gas (argon or nitrogen) through a gas dispersion frit and through the reaction mixture while agitating and heating the mixture to 130°C.

The final reaction product is cooled slightly and collected in glass containers  
25 purged with nitrogen.

In other preparations the neutralization and deodorization is accomplished in  
the reactor before discharging the product.

If a PEI 1200 E7 is desired, the following step of catalyst addition will be  
30 included between Step A and B.

Vacuum is continuously applied while the autoclave is cooled to about 50°C while introducing 376g of a 25% sodium methoxide in methanol solution (1.74 moles, to achieve a 10% catalyst loading based upon PEI nitrogen  
35 functions).

The methoxide solution is sucked into the autoclave under vacuum and then the autoclave temperature controller setpoint is increased to 130°C. A device is used to monitor the power consumed by the agitator. The agitator power is monitored along with the temperature and pressure. Agitator power and temperature values gradually increase as methanol is removed from the autoclave and the viscosity of the mixture increases and stabilizes in about 1 hour indicating that most of the methanol has been removed. The mixture is further heated and agitated under vacuum for an additional 30 minutes.

10

Vacuum is removed and the autoclave is cooled to 105°C while it is being charged with nitrogen to 250 psia and then vented to ambient pressure. The autoclave is charged to 200 psia with nitrogen. Ethylene oxide is again added to the autoclave incrementally as before while closely monitoring the autoclave pressure, temperature, and ethylene oxide flow rate while maintaining the temperature between 100°C and 110°C and limiting any temperature increases due to reaction exotherm. After the addition of 4,500g of ethylene oxide (resulting in a total of 7 moles of ethylene oxide per mole of PEI nitrogen function) is achieved over several hours, the temperature is increased to 110°C and the mixture stirred for an additional hour.

The reaction mixture is then collected in nitrogen purged containers and eventually transferred into a 22 L three neck round bottomed flask equipped with heating and agitation. The strong alkali catalyst is neutralized by adding 167g methanesulfonic acid (1.74 moles).

Other preferred examples such as PEI 1200 E15 and PEI 1200 E20 can be prepared by the above method by adjusting the reaction time and the relative amount of ethylene oxide used in the reaction.

#### Synthesis Example 6 -9.7% Quaternization of PEI 1200 E7

To a 500ml erlenmeyer flask equipped with a magnetic stirring bar is added poly(ethyleneimine), MW 1200 ethoxylated to a degree of 7 (248.4g, 0.707 mol nitrogen, prepared as in Synthesis Example 5) and acetonitrile (Baker, 200 mL). Dimethyl sulfate (Aldrich, 8.48g, 0.067 mol) is added all at once



to the rapidly stirring solution, which is then stoppered and stirred at room temperature overnight. The acetonitrile is evaporated on the rotary evaporator at  $\sim 60^{\circ}\text{C}$ , followed by a Kugelrohr apparatus (Aldrich) at  $\sim 80^{\circ}\text{C}$  to afford  $\sim 220\text{g}$  of the desired material as a dark brown viscous liquid.

- 5 A  $^{13}\text{C}$ -NMR ( $\text{D}_2\text{O}$ ) spectrum shows the absence of a peak at  $\sim 58\text{ppm}$  corresponding to dimethyl sulfate. A  $^1\text{H}$ -NMR ( $\text{D}_2\text{O}$ ) spectrum shows the partial shifting of the peak at  $2.5\text{ppm}$  (methylenes attached to unquaternized nitrogens) to  $\sim 3.0\text{ppm}$ .

10 Synthesis Example 7-4.7% Oxidation of 9.5% Quaternized PEI 1200 E7

- To a 500ml erlenmeyer flask equipped with a magnetic stirring bar is added poly(ethyleneimine), MW 1200 which has been ethoxylated to a degree of 7, and  $\sim 9.5\%$  quaternized with dimethyl sulfate (144g,  $\sim 0.37$  mol  
15 oxidizable nitrogen, prepared as in Example 6), hydrogen peroxide (Aldrich, 35.4g of a 50 wt% solution in water, 0.52 mol), and water (100g). The flask is stoppered, and after an initial exotherm the solution is stirred at room temperature overnight. A  $^1\text{H}$ -NMR ( $\text{D}_2\text{O}$ ) spectrum shows  
20 the total shifting of the methylene peaks at  $2.5\text{-}3.0\text{ppm}$  to  $\sim 3.5\text{ppm}$ . To the solution is added just enough sodium bisulfite as a 40% water solution to bring the residual peroxide level down to  $1\text{-}5\text{ppm}$ . The sodium sulfate which forms causes an aqueous phase to separate which contains salts, but little or no organics. The aqueous salt phase is removed and the desired  
25 oxidized polyethyleneimine derivative is obtained and stored as a 52% solution in water.

Example 1

The following compositions are in accordance with the present invention

30

Component	A	B	C	D	E	F	G
DEQA	2.6	2.9	18.0	19.0	19.0	-	-
				0			
TAE25		-	1.0	-	-	-	-
Fatty acid	0.3	-	1.0	-	-	-	-
Hydrochloride acid	0.02	0.02	0.02	0.0	0.02	-	-
				2			

PEG	-	-	0.6	0.6	0.6	-	-
Perfume	1.0	1.0	1.0	1.0	1.0	-	-
Silicone antifoam	0.01	0.01	0.01	0.01	0.01	-	-
PEI	3	3	3	3	3	15	10
Dye fix 1	1	1	1	1	1	5	10
Dye fix 2	2	2	2	2	-	-	-
Electrolyte (ppm)	-	-	600	600	1200	-	-
Dye (ppm)	10	10	50	50	50	-	-
Water and minors to balance to 100							

Component	H	I	J	K	L	M	N	O	P
DTDMAC	-	-	-	-	-	-	-	4.5	15
DEQA	2.6	2.9	18.0	19.0	19.0	-	-	-	-
TAE25	0.3	-	1.0	-	0.1	-	-	-	-
Fatty acid	0.3	-	1.0	-	-	-	-	-	-
Hydrochloride acid	0.02	0.02	0.02	0.02	0.02	-	-	0.02	0.02
PEG	-	-	0.6	0.6	0.6	-	-	-	0.6
Perfume	1.0	1.0	1.0	1.0	1.0	-	-	1.0	1.0
Silicone antifoam	0.01	0.01	0.01	0.01	0.01	-	-	0.01	0.01
PEI 1800 E1	3	-	-	3	-	10	-	-	3
PEI 1200 E1	-	3	3	-	3	-	15	3	-
Dye fix 1	1	1	1	1	3	10	5	1	1
Dye fix 2	2	2	2	2	-	-	-	2	2
Electrolyte (ppm)	-	-	600	600	1200	-	-	-	600
Dye (ppm)	10	10	50	50	50	-	-	10	50
Water and minors to balance to 100									


Example 2

The following compositions for use as dryer-added sheets are in accordance with the invention


	Q	R	S	T	U	V
DOEQA	39.16	24.79	--	--	--	--
DHEQA	--	--	21.81	--	--	--
DTDMAMS	--	--	--	18.64	11.94	62.0
SDASA	34.41	28.16	21.33	28.04	21.52	--
Glycosperse S-20	--	--	12.38	--	--	--
Glycerol Monostearate	--	--	--	18.87	13.23	--
Clay	4.02	4.02	3.16	3.91	3.90	--
Perfume	0.7	1.1	0.7	1.6	2.6	1.4
PEI	-	5.3	-	-	-	-
PEI 1200 E1	-	-	4.1	2.2	-	-
PEI 1800 E1	2.1	-	-	-	5.2	7.0
Dye fix 1	2.1	5.3	4.1	2.2	5.2	3.2
Stearic acid to balance						

What is claimed is:

1. A composition comprising a dye fixing agent and an amino-functional polymer comprising a polyamine backbone corresponding to the formula:




having a polyamine formula  $V_{(n+1)}W_mY_nZ$  or a polyamine backbone corresponding to the formula:

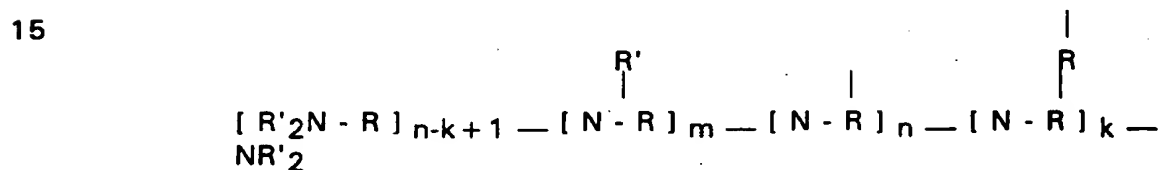


having a polyamine formula  $V_{(n-k+1)}W_mY_nY'_kZ$ , wherein  $k$  is less than or equal to  $n$ , said polyamine backbone has a molecular weight greater than 200 daltons, wherein


- i)  $V$  units are terminal units having the formula:



- ii)  $W$  units are backbone units having the formula:




iii) Y units are branching units having the formula:




5

iv) Y' units are branch point for a backbone or branch ring having the formula:



10

v) Z units are terminal units having the formula:



15

wherein backbone linking R units are selected from the group consisting of C<sub>2</sub>-C<sub>12</sub> alkylene, C<sub>4</sub>-C<sub>12</sub> alkenylene, C<sub>3</sub>-C<sub>12</sub> hydroxyalkylene, C<sub>4</sub>-C<sub>12</sub> dihydroxy-alkylene, C<sub>8</sub>-C<sub>12</sub> dialkylarylene, -(R<sup>1</sup>O)<sub>x</sub>R<sup>1</sup>-, -(R<sup>1</sup>O)<sub>x</sub>R<sup>5</sup>(OR<sup>1</sup>)<sub>x</sub>-,

20

-(CH<sub>2</sub>CH(OR<sup>2</sup>)CH<sub>2</sub>O)<sub>z</sub>(R<sup>1</sup>O)<sub>y</sub>R<sup>1</sup>(OCH<sub>2</sub>CH(OR<sup>2</sup>)CH<sub>2</sub>)<sub>w</sub>-,

-C(O)(R<sup>4</sup>)<sub>r</sub>C(O)-, -CH<sub>2</sub>CH(OR<sup>2</sup>)CH<sub>2</sub>-, and mixtures thereof;

25


wherein R<sup>1</sup> is selected from the group consisting of C<sub>2</sub>-C<sub>6</sub> alkylene and mixtures thereof; R<sup>2</sup> is selected from the group consisting of hydrogen, -(R<sup>1</sup>O)<sub>x</sub>B, and mixtures thereof; R<sup>4</sup> is selected from the group consisting of C<sub>1</sub>-C<sub>12</sub> alkylene, C<sub>4</sub>-C<sub>12</sub> alkenylene, C<sub>8</sub>-C<sub>12</sub> arylalkylene, C<sub>6</sub>-C<sub>10</sub> arylene, and mixtures thereof; R<sup>5</sup> is selected

from the group consisting of C<sub>1</sub>-C<sub>12</sub> alkylene, C<sub>3</sub>-C<sub>12</sub> hydroxyalkylene, C<sub>4</sub>-C<sub>12</sub> dihydroxy-alkylene, C<sub>8</sub>-C<sub>12</sub> dialkylarylene, -C(O)-, -C(O)NHR<sup>6</sup>NHC(O)-, -R<sup>1</sup>(OR<sup>1</sup>)-, -C(O)(R<sup>4</sup>)<sub>r</sub>C(O)-, -CH<sub>2</sub>CH(OH)CH<sub>2</sub>-, -CH<sub>2</sub>CH(OH)CH<sub>2</sub>O(R<sup>1</sup>O)<sub>y</sub>R<sup>1</sup>OCH<sub>2</sub>


- CH(OH)CH<sub>2</sub>-, and mixtures thereof; R<sup>6</sup> is selected from the group consisting of C<sub>2</sub>-C<sub>12</sub> alkylene or C<sub>6</sub>-C<sub>12</sub> arylene; R' units are selected from the group consisting of hydrogen, C<sub>1</sub>-C<sub>22</sub> alkyl, C<sub>3</sub>-C<sub>22</sub> alkenyl, C<sub>7</sub>-C<sub>22</sub> arylalkyl, C<sub>2</sub>-C<sub>22</sub> hydroxyalkyl, -(CH<sub>2</sub>)<sub>p</sub>CO<sub>2</sub>M, -(CH<sub>2</sub>)<sub>q</sub>SO<sub>3</sub>M, -CH(CH<sub>2</sub>CO<sub>2</sub>M)CO<sub>2</sub>M, -(CH<sub>2</sub>)<sub>p</sub>PO<sub>3</sub>M, -(R<sup>1</sup>O)<sub>x</sub>B, -C(O)R<sup>3</sup>, and mixtures thereof; B is selected from the group consisting of hydrogen, C<sub>1</sub>-C<sub>6</sub> alkyl, -(CH<sub>2</sub>)<sub>q</sub>SO<sub>3</sub>M, -(CH<sub>2</sub>)<sub>p</sub>CO<sub>2</sub>M, -(CH<sub>2</sub>)<sub>q</sub>(CHSO<sub>3</sub>M)CH<sub>2</sub>SO<sub>3</sub>M, -(CH<sub>2</sub>)<sub>q</sub>-(CHSO<sub>2</sub>M)CH<sub>2</sub>SO<sub>3</sub>M, -(CH<sub>2</sub>)<sub>p</sub>PO<sub>3</sub>M, -PO<sub>3</sub>M, and mixtures thereof; R<sup>3</sup> is selected from the group consisting of C<sub>1</sub>-C<sub>18</sub> alkyl, C<sub>7</sub>-C<sub>12</sub> arylalkyl, C<sub>7</sub>-C<sub>12</sub> alkyl substituted aryl, C<sub>6</sub>-C<sub>12</sub> aryl, and mixtures thereof; M is hydrogen or a water-soluble cation in sufficient amount to satisfy charge balance; X is a water-soluble anion; m has the value from 2 to 700; n has the value from 0 to 350; p has the value from 1 to 6, q has the value from 0 to 6; r has the value of 0 or 1; w has the value 0 or 1; x has the value from 1 to 100; y has the value from 0 to 100; z has the value 0 or 1.
2. A composition according to Claim 1, wherein the R units of said amino-functional polymer backbone are selected from the group consisting of C<sub>2</sub>-C<sub>12</sub> alkylene, C<sub>3</sub>-C<sub>12</sub> hydroxyalkylene, C<sub>4</sub>-C<sub>12</sub> dihydroxyalkylene, -(R<sup>1</sup>O)<sub>x</sub>R<sup>1</sup>-, -(R<sup>1</sup>O)<sub>x</sub>R<sup>5</sup>-(OR<sup>1</sup>)<sub>x</sub>-, -(CH<sub>2</sub>CH(OH)CH<sub>2</sub>O)<sub>z</sub>(R<sup>1</sup>O)<sub>y</sub>R<sup>1</sup>(OCH<sub>2</sub>CH(OH)CH<sub>2</sub>)<sub>w</sub>-, and mixtures thereof, preferably selected from the group consisting of C<sub>2</sub>-C<sub>6</sub> alkylene.
  3. A composition according to either one of Claim 1 or 2, wherein R<sup>1</sup> is at least 50% ethylene, preferably R<sup>1</sup> is ethylene.
  4. A composition according to any one of Claims 1-3, wherein R<sup>2</sup> is hydrogen.
  5. A composition according to any one of Claims 1-4, wherein R<sup>3</sup> is selected from the group consisting of C<sub>1</sub>-C<sub>12</sub> alkyl, C<sub>7</sub>-C<sub>12</sub> alkylarylene, and mixtures thereof, preferably R<sup>3</sup> is C<sub>1</sub>-C<sub>12</sub> alkyl and mixtures thereof, more preferably R<sup>3</sup> is C<sub>1</sub>-C<sub>6</sub> alkyl and mixtures thereof.

6. A composition according to any one of Claims 1-5, wherein  $R^4$  is selected from the group consisting of  $C_2$ - $C_{12}$  alkylene,  $C_8$ - $C_{12}$  arylalkylene, and mixtures thereof, preferably  $R^4$  is  $C_2$ - $C_{12}$  alkylene and mixtures thereof, more preferably  $R^4$  is  $C_2$ - $C_6$  alkylene and mixtures thereof.
7. A composition according to any one of Claims 1-6, wherein  $R^5$  is ethylene,  $-C(O)-$ ,  $-C(O)NHR^6NHC(O)-$ ,  $-R^1(OR^1)_y-$ ,  $-(CH_2CH(OH)CH_2O)_z(R^1O)_yR^1-(OCH_2CH(OH)CH_2)_w-$ ,  $-CH_2CH(OH)CH_2-$ , and mixtures thereof, preferably  $R^5$  is  $-CH_2CH(OH)CH_2-$ .
8. A composition according to any one of Claims 1-7, wherein  $R'$  units are selected from the group consisting of hydrogen,  $C_3$ - $C_{22}$  hydroxyalkyl, benzyl,  $C_1$ - $C_{22}$  alkyl,  $-(R^1O)_xB$ ,  $-C(O)R^3$ ,  $-(CH_2)_pCO_2^-M^+$ ,  $-(CH_2)_qSO_3^-M^+$ ,  $-CH(CH_2CO_2M)CO_2M$  and mixtures thereof, preferably  $R'$  units are selected from the group consisting of hydrogen,  $C_1$ - $C_{22}$  alkyl,  $-(R^1O)_xB$ ,  $-C(O)R^3$ , and mixtures thereof, more preferably  $R'$  units are  $-(R^1O)_xB$ .
9. A composition according to any one of Claims 1-8, wherein  $x$  has a value lying in the range of from 1 to 20, preferably from 1 to 10.
10. A composition according to any one of Claims 1-9, wherein said dye fixing agent is a cationic dye fixing agent, preferably a polycationic dye fixing agent.
11. A composition according to any one of Claim 1-10, wherein said composition further comprises a dispersible polyolefin.
12. A composition according to any one of Claims 1-11, wherein said composition further comprises one or more fabric softening component.
13. A composition according to Claim 12, wherein said fabric softening component is a cationic fabric softening component, preferably a

biodegradable cationic fabric softener selected from quaternary ammonium compounds and amine precursors having the formula (I) or (II), below :

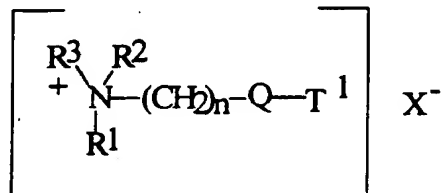

(I)

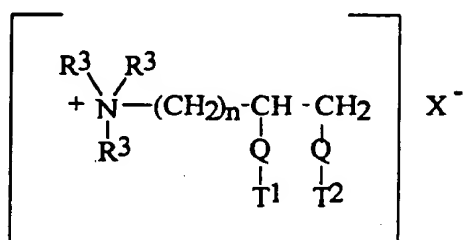

(II)

wherein Q is selected from -O-C(O)-, -C(O)-O-, -O-C(O)-O-, -NR<sup>4</sup>-C(O)-, -C(O)-NR<sup>4</sup>-;

R<sup>1</sup> is (CH<sub>2</sub>)<sub>n</sub>-Q-T<sup>2</sup> or T<sup>3</sup>;

R<sup>2</sup> is (CH<sub>2</sub>)<sub>m</sub>-Q-T<sup>4</sup> or T<sup>5</sup> or R<sup>3</sup>;

R<sup>3</sup> is C<sub>1</sub>-C<sub>4</sub> alkyl or C<sub>1</sub>-C<sub>4</sub> hydroxyalkyl or H;

R<sup>4</sup> is H or C<sub>1</sub>-C<sub>4</sub> alkyl or C<sub>1</sub>-C<sub>4</sub> hydroxyalkyl;

T<sup>1</sup>, T<sup>2</sup>, T<sup>3</sup>, T<sup>4</sup>, T<sup>5</sup> are independently C<sub>11</sub>-C<sub>22</sub> alkyl or alkenyl;

n and m are integers from 1 to 4; and

X<sup>-</sup> is a softener-compatible anion.

14. A composition according to any one of Claims 1-13, wherein said composition further comprises a surfactant concentration aid, preferably a nonionic alkoxyated surfactant.

15. A composition according to any one of Claims 1-14, wherein said composition is in a liquid form.



## INTERNATIONAL SEARCH REPORT

International Application No

PLI/US 96/15052

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 269 169 A (PROCTER & GAMBLE ;PROCTER & GAMBLE EUROP (BE)) 1 June 1988 see page 2 - page 6; claims 1-10	1
A	---	2-10, 16-19
A	EP 0 135 217 A (PROCTER & GAMBLE) 27 March 1985 see page 20, line 29 - page 24, line 16	2-10
A	---	2-10
A	EP 0 111 984 A (PROCTER & GAMBLE) 27 June 1984 see page 15, line 28 - page 18, line 3	2-10
A	---	11
A	DE 19 00 002 A (HENKEL & CIE GMBH) 30 July 1970 see claims 1,2; examples 1-4	
A	---	
A	GB 729 656 A (THE BRADFORD DYERS' ASSOCIATION LIMITED) 11 May 1955	
A	---	
A	GB 583 031 A (IMPERIAL CHEMICAL INDUSTRIES LIMITED) 5 December 1946 -----	

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/15052

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9627649 A	12-09-96	NONE	
EP 0462806 A	27-12-91	AT 148496 T	15-02-97
		AU 637504 B	27-05-93
		AU 7846191 A	02-01-92
		DE 69124425 D	13-03-97
		DE 69124425 T	15-05-97
		ES 2097186 T	01-04-97
		JP 2516490 B	24-07-96
		JP 4257380 A	11-09-92
EP 0581753 A	02-02-94	EP 0596184 A	11-05-94
		EP 0579295 A	19-01-94
		AU 4658193 A	14-02-94
		CA 2140282 A	03-02-94
		CN 1084214 A	23-03-94
		JP 8511811 T	10-12-96
		WO 9402578 A	03-02-94
		US 5470507 A	28-11-95
		US 5560858 A	01-10-96
		AU 4545693 A	14-02-94
		AU 4545793 A	14-02-94
		AU 4654293 A	14-02-94
		AU 4654393 A	14-02-94
		AU 4658293 A	14-02-94
		CA 2140283 A	03-02-94
		CA 2140289 A	03-02-94
		CN 1084211 A	23-03-94
		CN 1084212 A	23-03-94
		CN 1084213 A	23-03-94
		CN 1084561 A	30-03-94
		CN 1084215 A	23-03-94
		EP 0587549 A	16-03-94
		EP 0587550 A	16-03-94
		EP 0581751 A	02-02-94
		EP 0581752 A	02-02-94
		WO 9402576 A	03-02-94
		WO 9402577 A	03-02-94
		WO 9402579 A	03-02-94
		WO 9402580 A	03-02-94

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/15052

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0581753 A		WO 9402581 A	03-02-94
		US 5458809 A	17-10-95
		US 5478489 A	26-12-95
		US 5458810 A	17-10-95
		US 5460752 A	24-10-95
		AU 5590594 A	08-06-94
		CN 1088253 A	22-06-94
		JP 8505162 T	04-06-96
		WO 9411477 A	26-05-94
		AU 6636394 A	21-11-94
		EP 0622447 A	02-11-94
		JP 8511037 T	19-11-96
		WO 9425555 A	10-11-94
EP 0269169 A	01-06-88	AU 8143287 A	26-05-88
		DE 3781101 A	17-09-92
		IE 60696 B	10-08-94
		JP 63213598 A	06-09-88
EP 0135217 A	27-03-85	US 4548744 A	22-10-85
		AU 565773 B	24-09-87
		AU 3092184 A	24-01-85
		CA 1211113 A	09-09-86
		DE 3469302 A	17-03-88
		HK 78490 A	05-10-90
		IE 58109 B	14-07-93
		JP 1835363 C	11-04-94
		JP 60084259 A	13-05-85
EP 0111984 A	27-06-84	US 4676921 A	30-06-87
		CA 1235351 A	19-04-88
		CA 1210009 A	19-08-86
DE 1900002 A	30-07-70	NONE	
GB 729656 A		FR 1059717 A	26-03-54
GB 583031 A		NONE	